

EXTERIOR LIGHTING

BY  **EUROfase**
INC.



EXTERIOR LIGHTING **2019**








This catalog includes the full line of Eurofase exterior lighting.
For Eurofase interior, track, recessed, multiple-recessed, LED mirror, wall & ceiling,
visit eurofase.com or refer to the specific lighting catalog.











Contents

Welcome to Eurofase Exterior Lighting

LANDSCAPE LIGHTING 12V

06 LIGHTING 101			
		12 12 VOLT LIGHTING	
14 Spot Light		19 Accent Light	
		20 Path Light	
40 Hardscape	42 Underwater	46 Surface Mount	
	48 In-Ground	58 ACCESSORIES	

LANDSCAPE LIGHTING 120V

60 120 VOLT LIGHTING			
		62 Bollard	
76 In-Ground		90 Surface Mount	130 In-Wall
			
	142 LED Sconce / Sign	144 Commercial	
			
DECORATIVE OUTDOOR 120V		150 DECORATIVE COLLECTIONS	

TOP 6 ADVANTAGES

OF LIGHTING UP YOUR LANDSCAPE



Brightening your landscape is as essential as adding light indoors. It not only beautifies your space but also adds practical applications. By simply adding landscape lighting, you can instantly maximize your living area. From a variety of different sizes and styles, the possibilities are endless. Ranging from small solar lights to large wall sconces, you can go from a quick facelift to a full renovation makeover depending on your needs. Understanding the advantages of outdoor lighting will help you to properly enhance your space and achieve this.

01 APPEARANCE

One obvious advantage to landscape lighting is the overall improved look of your home. Your home stays visible and stands out even at night. When used properly, outdoor lighting can highlight structural features adding intrigue and a sense of drama.

02 FUNCTIONALITY

Improve every inch of your space by adding outdoor lights to increase functionality. When your space is properly lit, the whole outside area can be utilized in a whole array of sorts after sundown. Don't be restricted to certain areas at specific times; expand your space physically as well as aesthetically.

03 VALUE

Any addition to your home will boost its worth. A quick way to increase its value is with the addition of lights. A beautiful, solid home will always be worth more and with landscape lighting you will be able to spot cracks and problem areas even in the dark to easily correct them and increase your property value. Lights also have a way of creating a wonderful ambiance and outdoor lighting can feel almost magical, adding luxury.

04 PERSONAL SAFETY

Without night-vision, it is hard to see in the dark. Outdoor lighting can help increase personal safety by lighting pathways and certain areas that are full of potential dangers like stairs, pools, and raised edges. Lighting those areas will decrease the frequency of accidental falls and other injuries while safely guiding people to and from your home.

05 HOME SECURITY

Having a well-lit space protects from criminals targeting your home. Vandals and burglars are more successful when they're hidden beneath the shadows. Brightly illuminating your home rids it of hiding spots for unwanted guests; focus on entrance points like doors and windows.

06 COST EFFECTIVE

LED lighting is growing in popularity so it's no surprise that it has expanded into outdoor lighting. It costs about 1/3 less than traditional lights, using less power than line voltage lighting. They're usually easy to set up allowing you to install them yourself without hiring someone else at an additional cost.

LANDSCAPE LIGHTING DESIGN TIPS

COLOR TEMPERATURE GUIDE

Seeing Things In A Different Light

CCT (correlated color temperature) defines the color appearance of white LED. It is particularly important in the lighting world as it allows for better viewing and clarity as colors appear differently under different lighting conditions. It adds ambiance and controls the emotional measure of a room or environment. CCT is measured in degrees Kelvin and will appear whiter the higher the Kelvin rating.




WARM WHITE - 2700K
Intimate, cozy, personal

Emits a warm white glow, often amber in appearance. Ideal for creating relaxing, comfortable outdoor environments.



SOFT WHITE - 3000K
Warm, calming

Produces a soft white light which tends to accentuate greens and blues in vegetation. Gives welcoming and soothing feeling.



BRIGHT WHITE - 4200K
Precise, clean, focused

Gives off a bright amount of cool white light. Ideal for walkways, outdoor paths and other areas around your home.

BEAM ANGLE GUIDE

Find the right light styles for the desired lighting effect



4° - 19°
SPOT

A narrow beam used to illuminate tall trees and column features.



20° - 35°
FLOOD

Medium height and width beam of light suited for general accent lighting.



36° - 65°
WIDE FLOOD

Short and wide beam of light useful for broad trees and wide structures.



80° - 120°
VERY WIDE FLOOD

Ideal for big and wide objects.

LANDSCAPE LIGHTING TECHNIQUES

Helps you further understand outdoor lighting



WALL-WASH LIGHTING

Wall-washing is a technique used to highlight the textures of a wall or surface by placing the light far away from the wall pane. (p.105)

CROSS LIGHTING


Cross lighting involves two beams of light to bring a more even level of light illuminating the object/subject from multiple angles. Usually used to highlight larger trees or other tall items. (p.15)



ACCENT UPLIGHTING

As its name implies, this technique uses direct lights pointing up to illuminate an object or surface. (p.16)

LIGHTING TECHNIQUES

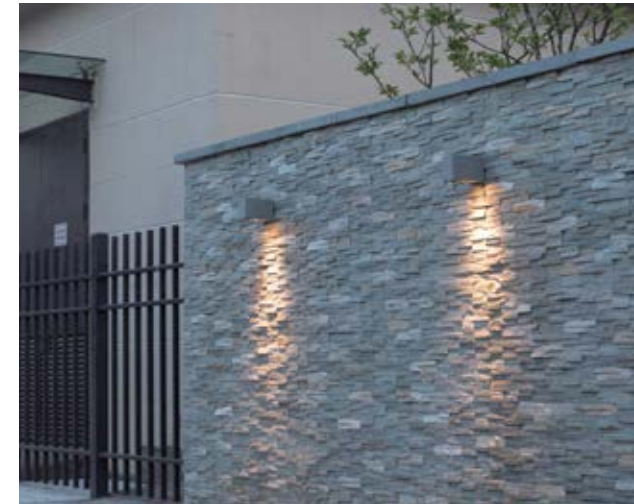

GRAZING

Grazing is ideal approach to emphasize the texture beauty of stone or brick retaining walls, fences, chimneys, and other interesting masonry. (p.105)

MIRROR LIGHTING

This interesting technique expands space and adds an ethereal feel by using the water surface as a mirror to reflect light. (p.18)



SHADOWING

Shadowing is a technique created by placing a light fixture in front of the subject to shine through and intentionally create a shadow on a vertical surface. (p.15)



LIGHTING TECHNIQUES



UNDERWATER & WATER ACCENT LIGHTING

Light fixtures that can be submerged in water like ponds, fountains and pools to add intriguing glowing light effects. (p.42)

IN-GROUND LIGHTING

Used for two main reasons, in-ground lighting keeps visitors from wandering off from the lighted area and for decorative purposes; they are placed in ground. (p.84)



MOON LIGHTING

This technique mimics the effect the moon gives by placing low lumen lights high in a tree to shine through the branches. (p.19)

LIGHTING TECHNIQUES



PATH & SPREAD LIGHTING

Used to line pathways to safely guide people at night. (p.65)

HARDSCAPE LIGHTING

Smaller lights with brackets for easy installation into structures that highlight walls with light similar to wall-washing and grazing. (p.40)



DECK & PATIO LIGHTING

Illuminates and accentuates details of decks, patios, steps, and other similar areas. (p.88)

12 VOLT

Low voltage landscape lighting is the preferred choice for many residential properties. Many prefer this option because they are easier and less expensive to install as you do not require the help of a professional electrician. Low voltage outdoor lighting reduces the risk of shock and can be connected to a lighting system at a fraction of the cost it would take if line voltage was used.




SPOT LIGHT

DURABLE | ADJUSTABLE | WEATHERPROOF



Cylindrical Shroud



31950-015

- 3 x 2W LED
- 2700 Kelvin
- Lumen Output: 300lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.
- Available in narrow and wide beam angle. Refer to page #59




SPOT 40°



12V AC/DC

Step Shroud



31952-019


- 3 x 2W LED
- 2700 Kelvin
- Lumen Output: 300lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.
- Available in narrow and wide beam angle. Refer to page #59



SPOT 40°




12V AC/DC



31973-014

- 3 x 2W LED
- 2700 Kelvin
- Lumen Output: 300lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.
- Available in narrow and wide beam angle. Refer to page #59



31951-012 MINI


- 1 x 3W LED
- 2700 Kelvin
- Lumen Output: 120lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.



Without shroud

Minimum length of the shroud

Maximum length of the shroud



31949-019

- 3 x 2W LED
- 2700 Kelvin
- Lumen Output: 300lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.
- Available in narrow and wide beam angle. Refer to page #59




Without shroud

Minimum length of the shroud

Maximum length of the shroud


12V SPOT LIGHT

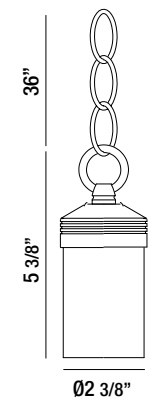

31930-017

- 3 x 2W LED
- 2700 Kelvin
- Lumen Output: 300lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Available in narrow and wide beam angle. Refer to page #59


SPOT 40°



31974-011

- 3 x 2W LED
- 2700 Kelvin
- Lumen Output: 300lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Available in narrow and wide beam angle. Refer to page #59

SPOT 40°

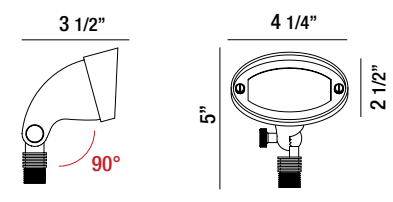

31926-010

- 1 x 3W LED
- 2700 Kelvin
- Lumen Output: 120lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.

SPOT 40°







DESIGN TIP
Oval head provides wide beam angle

PATH LIGHT

DURABLE | LOW VOLTAGE | WEATHERPROOF



12V PATH LIGHT

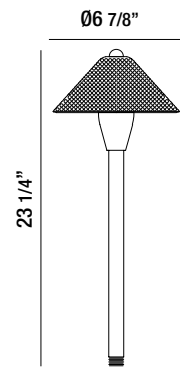

31937-016



31938-013



31934-015



31936-019



- 4W LED
- 2700 Kelvin
- Lumen Output: 150lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.



- 4W LED
- 2700 Kelvin
- Lumen Output: 200lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid aluminum body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.




- 4W LED
- 2700 Kelvin
- Lumen Output: 150lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.



- 4W LED
- 2700 Kelvin
- Lumen Output: 150lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.




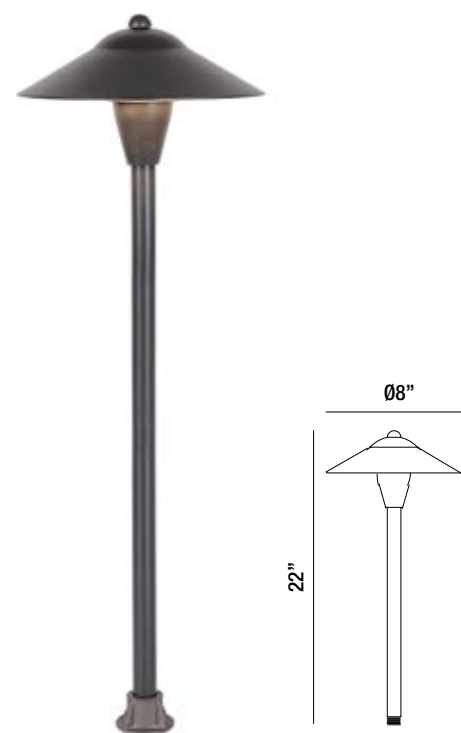

31935-012




- 4W LED
- 2700 Kelvin
- Lumen Output: 150lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid aluminum body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.

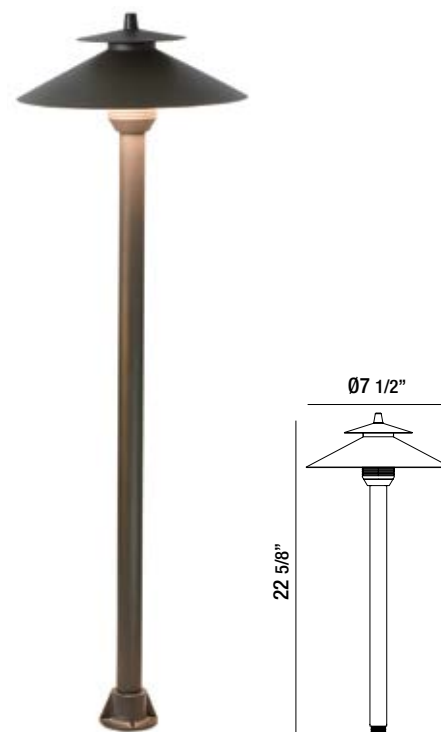

31939-010



- 4W LED
- 2700 Kelvin
- Lumen Output: 150lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.


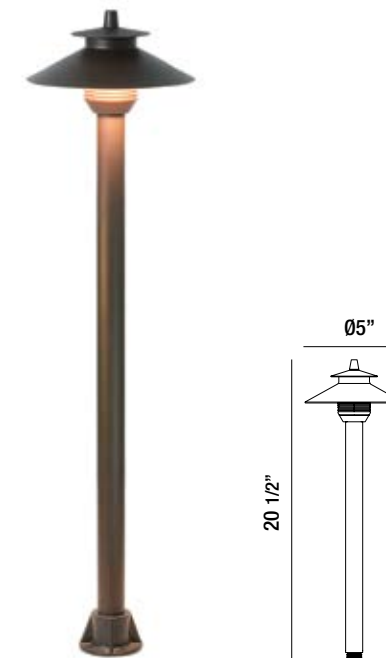


31940-016



- 4W LED
- 2700 Kelvin
- Lumen Output: 150lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.



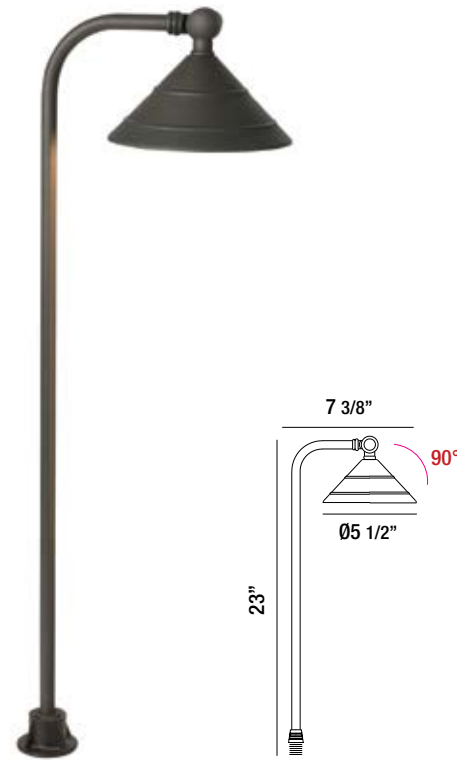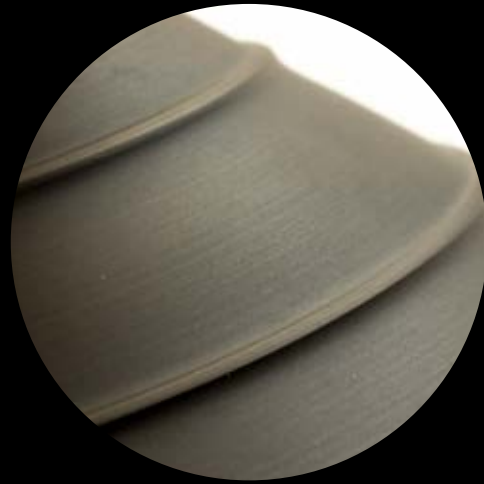

31932-011




- 4W LED
- 2700 Kelvin
- Lumen Output: 150lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.



31931-014



- 4W LED
- 2700 Kelvin
- Lumen Output: 150lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.

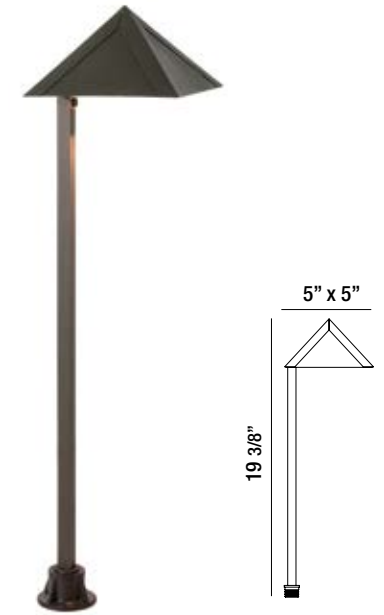

31933-018




- 4W LED
- 2700 Kelvin
- Lumen Output: 150lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.







12V PATH LIGHT

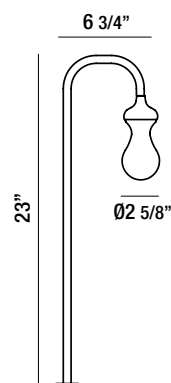

35895-015



- 4W LED
- 3000 Kelvin
- Lumen Output: 210lm
- Transformer not included
- IP 65
- CRI: 80+
- Black finish with clear seeded glass
- High corrosion resistant aluminum body
- Powder coated with pretreatment for outdoor use
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.

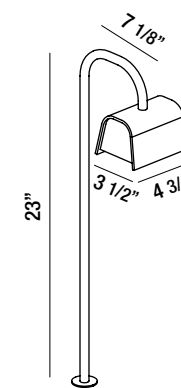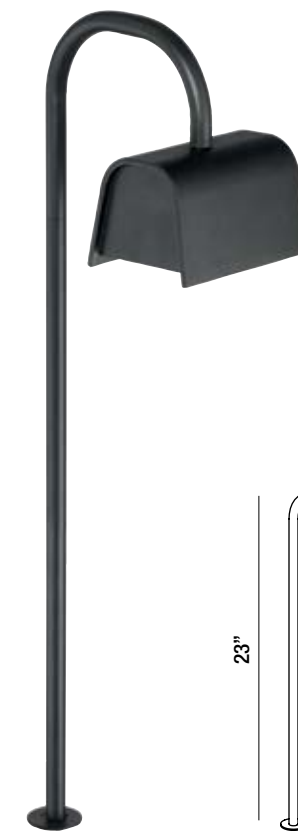

35893-011

- 4W LED
- 3000 Kelvin
- Lumen Output: 250lm
- Transformer not included
- IP 65
- CRI: 80+
- Black finish
- High corrosion resistant aluminum body
- Black powder coated with pretreatment for outdoor use
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.



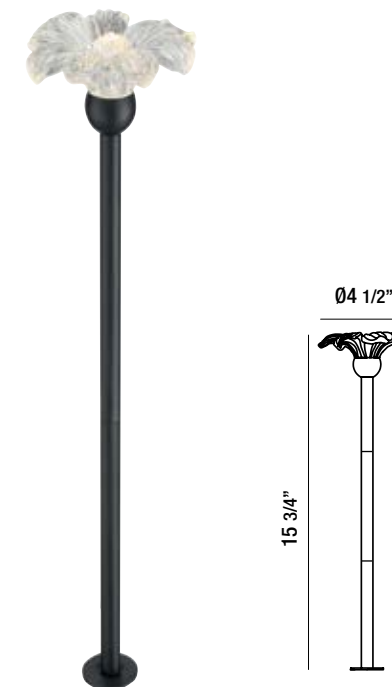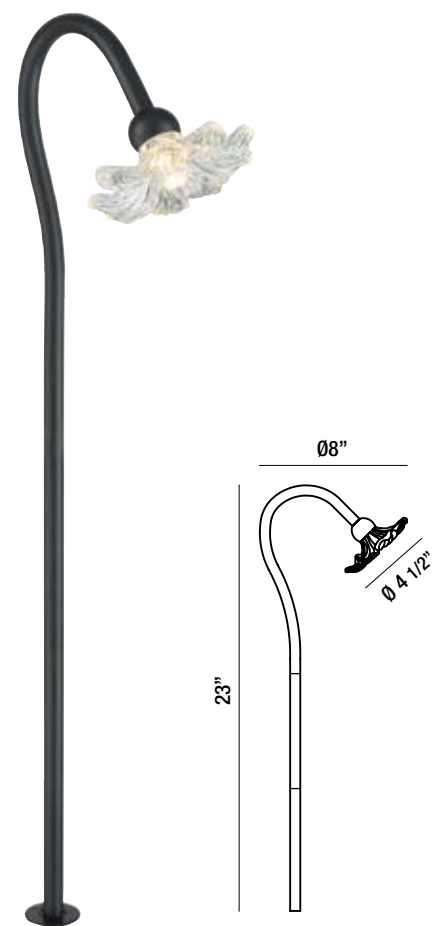

36202-010


- 2W LED
- 3000 Kelvin
- Lumen Output: 120lm
- Transformer not included
- IP 65
- CRI: 80+
- Black finish with clear glass
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.



35894-018



- 2W LED
- 3000 Kelvin
- Lumen Output: 120lm
- Transformer not included
- IP 65
- CRI: 80+
- Black finish with clear glass
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.



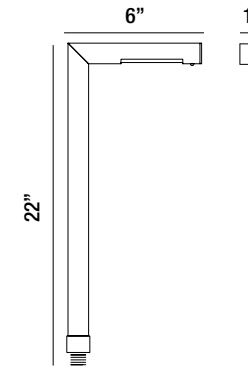

31945-011


- 3W LED
- 2700 Kelvin
- Lumen Output: 120lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.

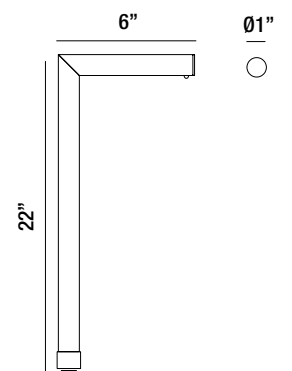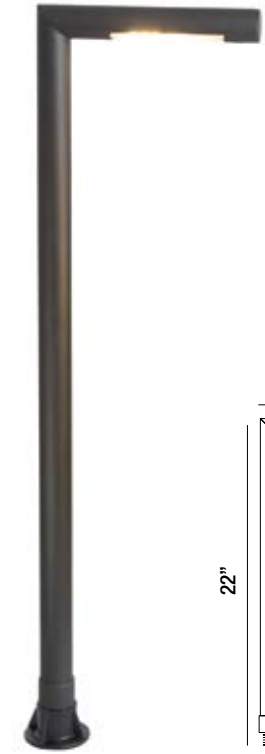

31946-018


- 3W LED
- 2700 Kelvin
- Lumen Output: 120lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.





31943-017

- 3W LED
- 2700 Kelvin
- Lumen Output: 120lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.




31944-014

- 3W LED
- 2700 Kelvin
- Lumen Output: 150lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.




12V BOLLARD




31947-015

- 3 x 2W CREE LED
- 2700 Kelvin
- Lumen Output: 250lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included




35896-012

- 4W LED
- 3000 Kelvin
- Lumen Output: 210lm
- Transformer not included
- IP 65
- CRI: 80+
- Crystal glass
- Black finish
- High corrosion resistant aluminum body
- Powder coated with pretreatment for outdoor use
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included



31948-012


- 3 x 2W CREE LED
- 2700 Kelvin
- Lumen Output: 250lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included



35897-019


- 4W LED
- 3000 Kelvin
- Lumen Output: 210lm
- Transformer not included
- IP 65
- CRI: 80+
- Crystal glass
- Black finish
- High corrosion resistant aluminum body
- Powder coated with pretreatment for outdoor use
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included



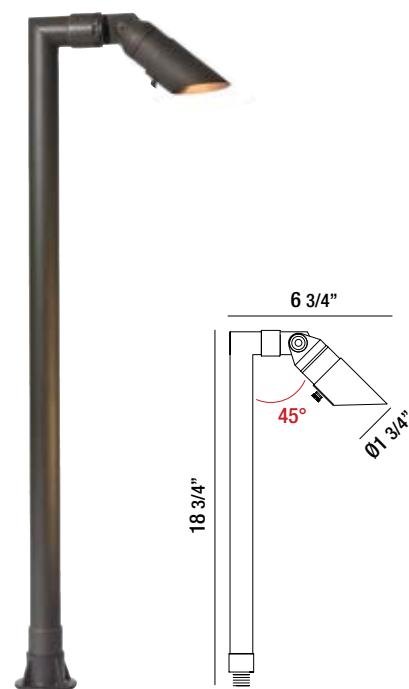


31941-013

- 3W LED
- 2700 Kelvin
- Lumen Output: 120lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.

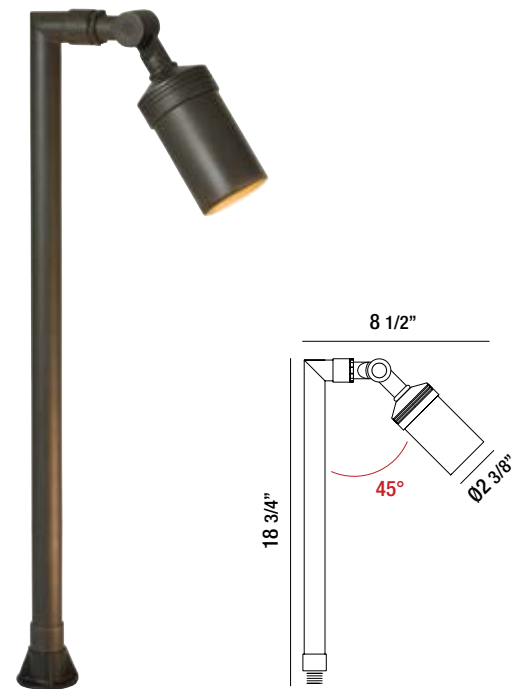


31942-010

- 3 x 2W LED
- 2700 Kelvin
- Lumen Output: 300lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.
- Available in narrow and wide beam angle. Refer to page #59

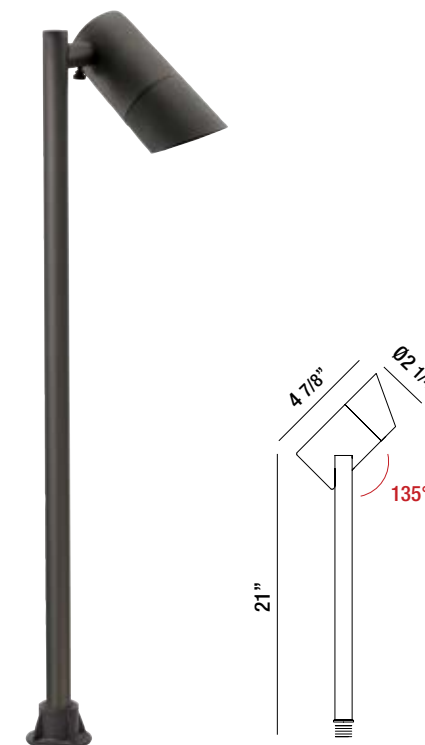


31975-018

- 3 x 2W LED
- 2700 Kelvin
- Lumen Output: 300lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Antique bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- 8" Stake included. For more mounting options, refer to page #58.
- Available in narrow and wide beam angle. Refer to page #59

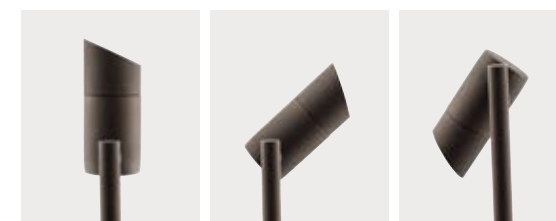


HARDSCAPE

DURABLE | LOW PROFILE | WEATHERPROOF



31955-010 2700K
31956-017 3500K

- 0.8W CREE LED
- Lumen Output: 65lm
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Transformer not included
- Textured bronze finish
- Wire lead included: 3 feet



31957-014 2700K
31958-011 3500K


- 1.4W CREE LED
- Lumen Output: 130lm
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Transformer not included
- Textured bronze finish
- Wire lead included: 3 feet



UNDERWATER


DURABLE | SUBMERSIBLE | WEIGHTED BASE





General light

31959-018



- 3 x 2W LED
- 2700 Kelvin
- Lumen Output: 300lm
- Transformer not included
- Solid brass body
- IP 68
- CRI: 80+
- Antique bronze finish
- 25 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass
- Available in narrow and wide beam angle. Refer to page #59




SPOT 40°



Directional light

31960-014



- 3 x 2W LED
- 2700 Kelvin
- Lumen Output: 300lm
- Transformer not included
- Solid brass body
- IP 68
- CRI: 80+
- Antique bronze finish
- 25 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass
- Available in narrow and wide beam angle. Refer to page #59.



SPOT 40°




Tempered safety glass, waterproof up to 10 feet



Adjustable head up to 180°



Weighted base




31954-013

- 4 x 1W LED
- 2700 Kelvin
- Lumen Output: 170lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Textured bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included



up & down light



31953-016

- 1 x 3W LED
- 2700 Kelvin
- Lumen Output: 120lm
- Transformer not included
- IP 65
- CRI: 80+
- Solid brass body
- Textured bronze finish
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included




down light

IN-GROUND



LOW VOLTAGE | WEATHERPROOF | ENERGY SAVING







35918-011

- 3W LED
- 3000 Kelvin
- Lumen Output: 275lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant stainless steel body
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass

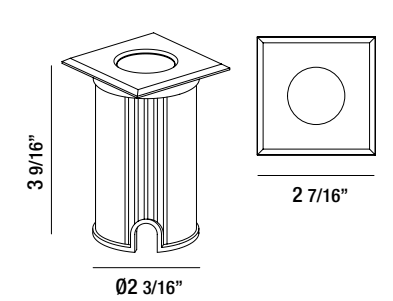


36028-016

- 3W LED
- 3000 Kelvin
- Lumen Output: 275lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant stainless steel body
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass

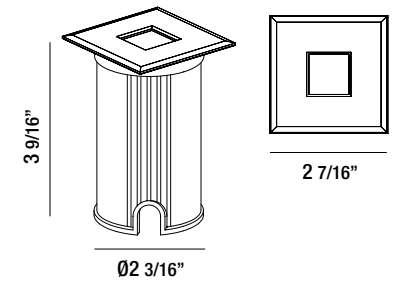

35917-014

- 3W LED
- 3000 Kelvin
- Lumen Output: 275lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant stainless steel body
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



12V IN-GROUND



35915-010

- 3W LED
- 3000 Kelvin
- Lumen Output: 275lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant stainless steel body
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



SPOT 120°



MAX 500 kg



35916-017

- 3W LED
- 3000 Kelvin
- Lumen Output: 275lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant stainless steel body
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



SPOT 120°



MAX 500 kg



35086-011

- 1W LED
- 3000 Kelvin
- Total Lumen Output: 100lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant stainless steel body
- Stainless steel ring AISI 304
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



MAX 500 kg




35087-018

- 3W LED
- 3000 Kelvin
- Total Lumen Output: 290lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant stainless steel body
- Stainless steel ring AISI 304
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



MAX 500 kg




32097-016


- 1 X 4.5W OSRAM LED
- 3000 Kelvin
- Lumen Output: 250lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Silicone rubber gasket
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



SPOT 25°



MAX 100 kg




32098-013


- 1 X 4.5W OSRAM LED
- 3000 Kelvin
- Lumen Output: 250lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Silicone rubber gasket
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



SPOT 25°



MAX 100 kg




32099-010


- 1 X 10W OSRAM LED
- 3000 Kelvin
- Lumen Output: 750lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Silicone rubber gasket
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



SPOT 25°



MAX 100 kg




32100-013


- 1 X 10W OSRAM LED
- 3000 Kelvin
- Lumen Output: 750lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Silicone rubber gasket
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



SPOT 25°




MAX 100 kg




36398-010

- 7W LED
- 3000 Kelvin
- Lumen Output: 530lm
- Driver not included 12V AC/DC
- IP 67
- CRI: 80+
- High corrosion resistant stainless steel body
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



MAX 500 kg

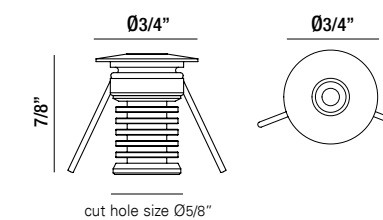

36052-011

- 0.5W COB LED
- 3000 Kelvin
- Lumen Output: 50lm
- Driver not included 12V DC
- IP 65
- CRI: 80+
- High corrosion resistant aluminum body
- Max static weight resistant 100kg
- 12-inch wire included



MAX 100 kg



ACCESSORIES



31961-011

Round casting mounting base with standard 1/2IPS thread solid brass



31962-018

Tree bracket with 1/2IPS thread solid brass



32399-12-100

32399-12-250

32399-12-500

100ft/250ft/500ft
12 gauge landscape wire



31963-015

Blue waterproof wire connector
Ø1.36" x H1"



31964-012

Black waterproof wire connector
Ø1.36" x H1"



31965-019

Waterproof wire connector
Ø1.5" x H1.13"



31966-016

7" Brass riser
Solid brass



31967-013

12" Brass riser
Solid brass



31968-010

18" Brass riser
Solid brass



31976-015

Ø2" x 8" Stake

CHANGEABLE LENS



20°

31969-017

20 degree — narrow beam angle






60°


31970-013

60 degree — wide beam angle

TRANSFORMERS

	MODEL	WATTAGE	CASE MATERIAL	OUTPUT VOLTAGE	PHOTOCELL/TIMER	REMARK
	32356-014	100W	Plastic	12V	Included	Suitable for use with submersible luminaires or submersible pumps
	32357-011	150W	Plastic	12V	Included	Suitable for use with submersible luminaires or submersible pumps
	32359-015	300W	Stainless steel	12V/13V/ 14V/15V	with mechanical timer and remote photocell	Suitable for use with submersible luminaires or submersible pumps

PHOTOCELL / TIMER

	MODEL	CASE MATERIAL	OUTPUT VOLTAGE	REMARK
	32358-018	Plastic	120V AC	Suitable for use with submersible luminaires or submersible pumps




120 VOLT

Line voltage landscape lighting is most commonly used in commercial areas. Unlike low voltage lighting, line voltage systems operate with more power which produces larger light outputs despite using fewer fixtures. It can also be applied in residential areas where expanded up-lighting on large buildings or structures are needed.

BOLLARD


DURABLE | DUST TIGHT | WEATHERPROOF

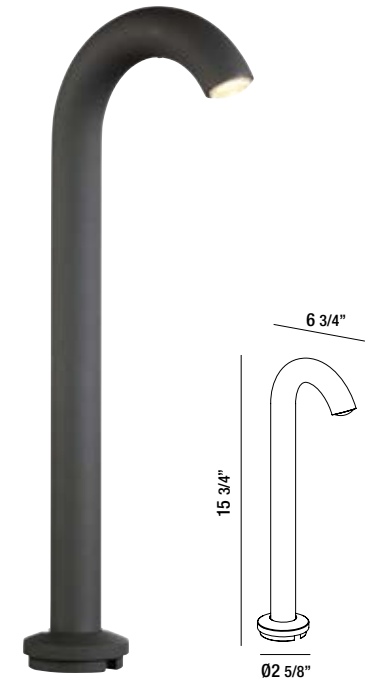

31912-020


- 1 x 4W CREE LED
- 3000 Kelvin
- Lumen Output: 320lm
- LED driver included
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Electronic driver 120V 50/60Hz
- Silicone rubber gasket
- Powder coated graphite grey finish



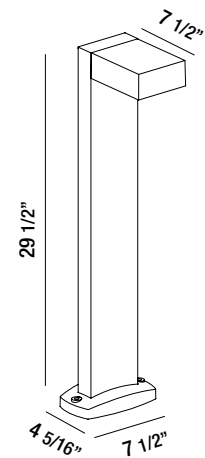

31909-027

- 1 x 7W CREE LED
- 3000 Kelvin
- Lumen Output: 340lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish

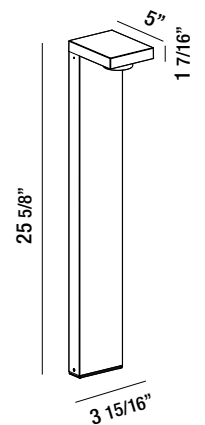


31911-023

- 1 x 7W CREE LED
- 3000 Kelvin
- Lumen Output: 280lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish




120V BOLLARD

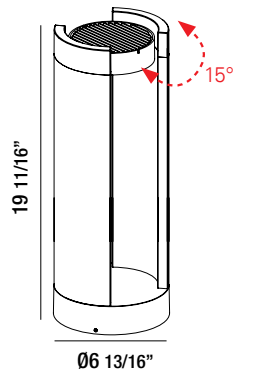

31922-029


- 15W LED
- 3000 Kelvin
- Lumen Output: 720lm
- Line voltage AC LED included 120V input
- IP 65
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish

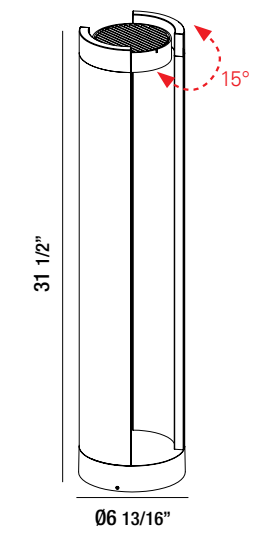

31923-026


- 15W LED
- 3000 Kelvin
- Lumen Output: 720lm
- Line voltage AC LED included 120V input
- IP 65
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish






31916-028

- 1 x 7W CREE LED
- 3000 Kelvin
- Lumen Output: 300lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish

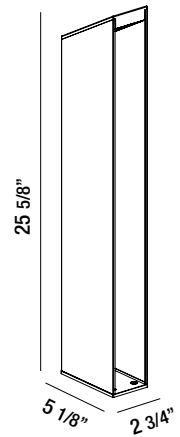


31915-021

- 3 x 3W CREE LED
- 3000 Kelvin
- Lumen Output: 100lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish



31913-027

- 1 x 7W CREE LED
- 3000 Kelvin
- Lumen Output: 140lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish

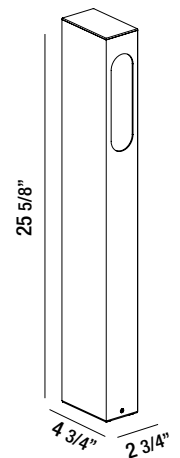

31914-024


- 1 x 7W CREE LED
- 3000 Kelvin
- Lumen Output: 140lm
- LED driver included
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Electronic driver 120V 50/60Hz
- Silicone rubber gasket
- Powder coated graphite grey finish






31918-022


- 16W CREE LED
- 3000 Kelvin
- Lumen Output: 900lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish

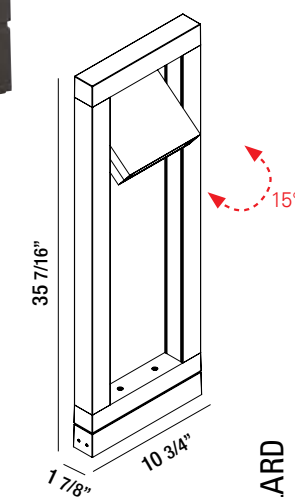




31919-029

- 30W LED
- 3000 Kelvin
- Lumen Output: 1340lm
- Line voltage AC LED included 120V input
- IP 65
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish



31921-022


- 15W LED
- 3000 Kelvin
- Lumen Output: 780lm
- Line voltage AC LED included 120V input
- IP 65
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish



31920-025


- 12W LED
- 3000 Kelvin
- Lumen Output: 500lm
- Line voltage AC LED included 120V input
- IP 65
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish



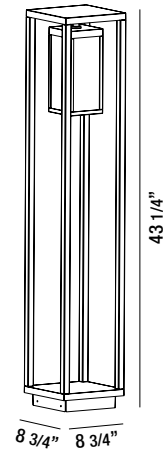


34122-013

- 13W CREE LED
- 3000 Kelvin
- Lumen Output: 750lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish with pretreatment for outdoor use
- Patented design

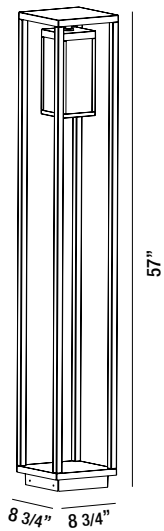


34123-010

- 13W CREE LED
- 3000 Kelvin
- Lumen Output: 750lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish with pretreatment for outdoor use
- Patented design



34124-017

- 6W CREE RGB LED
- 3000 Kelvin
- Lumen Output: 220lm
- Lithium battery included
- Electronic charger 120V 50/60Hz
- Portable
- Bluetooth speaker to play music
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish with pretreatment for outdoor use
- Patented design



34125-014


- 13W CREE LED
- 3000 Kelvin
- Lumen Output: 750lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated graphite grey finish with pretreatment for outdoor use
- Cover plate included for standard junction box
- Patented design



IN-GROUND



DURABLE | WEATHERPROOF | WIDE APPLICATION






32189-018

- 1 x 7W CREE LED
- 3000 Kelvin
- Lumen Output: 473lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass





32190-014

- 1 x 7W CREE LED
- 3000 Kelvin
- Lumen Output: 473lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



32191-011


- 6 x 1W OSRAM LED
- 3000 Kelvin
- Lumen Output: 443lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



32192-018

- 6 x 1W OSRAM LED
- 3000 Kelvin
- Lumen Output: 443lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass





32188-011


- 24 x 1W CREE SUPER LED
- 3000 Kelvin
- Lumen Output: 905lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



MAX 500 kg





SPOT 30°





31595-018

- 3 x 2W CREE LED
- 3000 Kelvin
- Lumen Output: 270lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- Adjustable $\pm 15^\circ$
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass





31596-015

- 3 x 2W CREE LED
- 3000 Kelvin
- Lumen Output: 270lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- Adjustable $\pm 15^\circ$
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass




32193-015


- 3 x 1W CREE LED
- 3000 Kelvin
- Lumen Output: 175lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



32194-012



- 3 x 1W CREE LED
- 3000 Kelvin
- Lumen Output: 175lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass






19552-019

- GU10 50W max
- 120V
- IP 67
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass




14746-017

- 3 X 1W EDISON LED
- 3000 Kelvin
- Total Lumen Output: 150lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phospho-chromating pre-finish
- Stainless steel ring AISI 304
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- 10 feet of waterproof, copper core, PVC jacketed body, UV protected wire included
- Tempered safety glass



MAX 500 kg

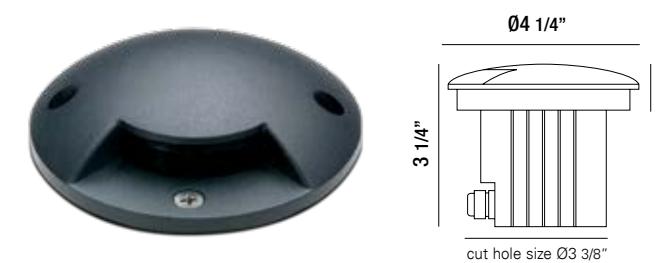

14750-014

- 1 X 1W OSRAM LED
- 3000 Kelvin
- Lumen Output: 80lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- Single direction marker light
- Polycarbonate lens
- Powder coated finish
- High corrosion resistant die-cast aluminum body
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included



down light



14748-011


- 1 X 1W OSRAM LED
- 3000 Kelvin
- Lumen Output: 75lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- Dual direction marker light
- Polycarbonate lens
- Powder coated finish
- High corrosion resistant die-cast aluminum body
- Polypropylene housing for recess included (concrete pour)
- 3 feet of waterproof, copper core, PVC jacketed body, UV protected wire included



up & down light




DECK LIGHT

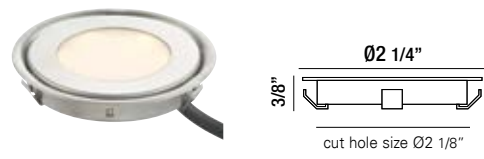


32093-018


- 6 x 0.5W LED deck light
- 3000 Kelvin
- Total Lumen Output: 42lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- With 36" wire lead and quick connector
- Max static weight resistant 100kg
- High corrosion resistant stainless steel body
- Tempered safety glass



SPOT 120°




MAX 100 kg

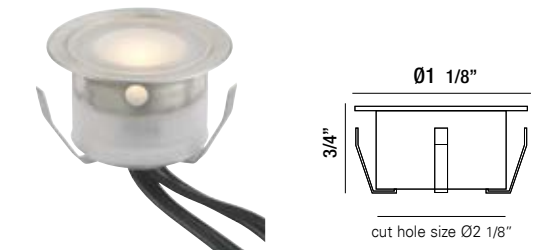


32094-015



- 6 x 0.6W LED deck light
- 3000 Kelvin
- Total Lumen Output: 54lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- With 36" wire lead and quick connector
- Max static weight resistant 100kg
- High corrosion resistant stainless steel body
- Tempered safety glass



SPOT 120°




MAX 100 kg

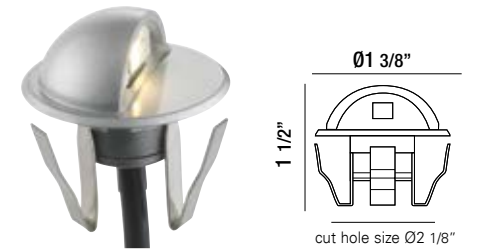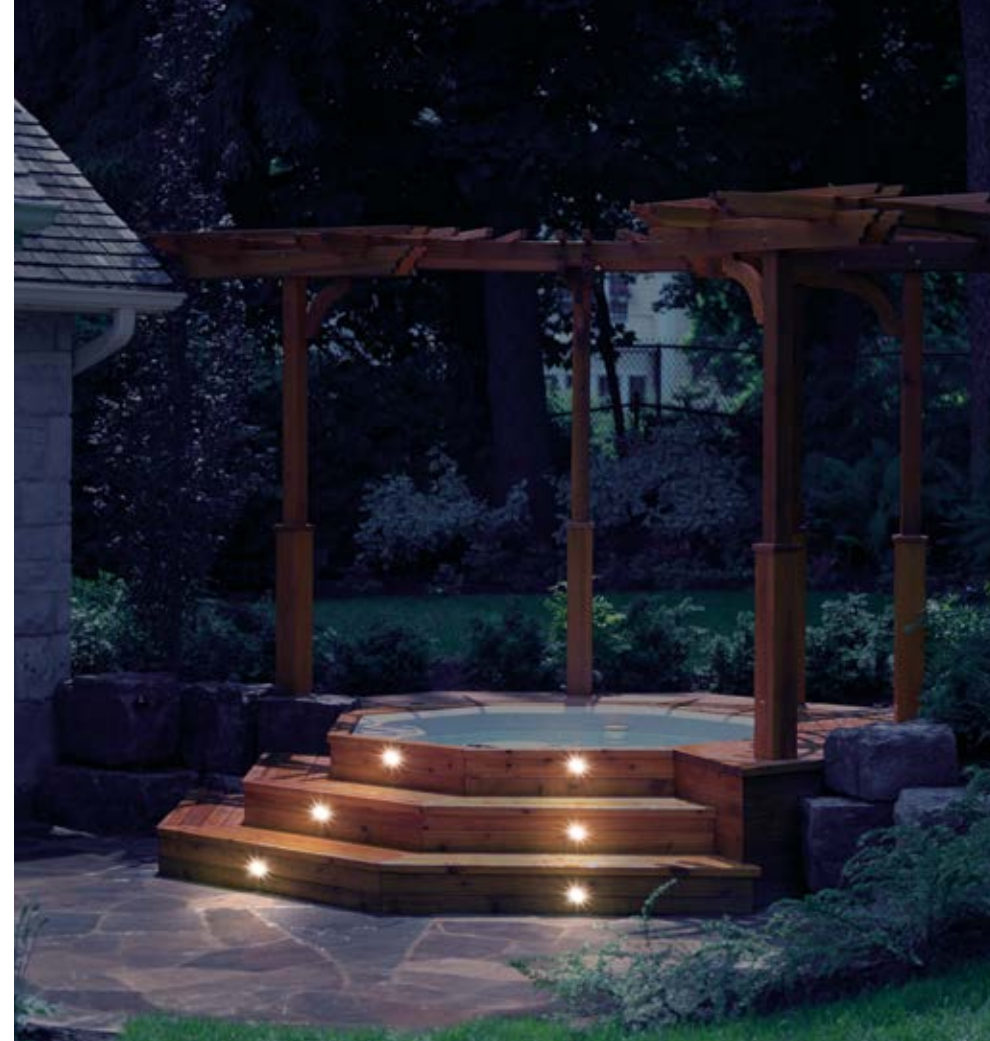

32095-012

- 6 x 0.4W LED deck step light
- 3000 Kelvin
- Total Lumen Output: 60lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- With 36" wire lead and quick connector
- High corrosion resistant stainless steel body
- Tempered safety glass

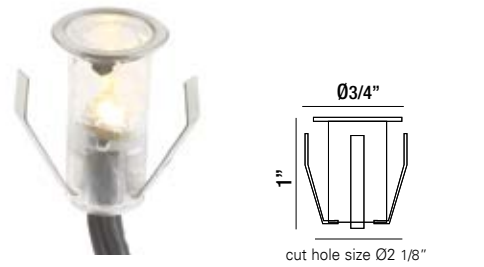


32096-019

- 10 x 0.4W LED deck light
- 3000 Kelvin
- Total Lumen Output: 70lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- With 36" wire lead and quick connector
- Max static weight resistant 100kg
- High corrosion resistant stainless steel body
- Tempered safety glass




SPOT 120°



MAX 100 kg


SURFACE MOUNT

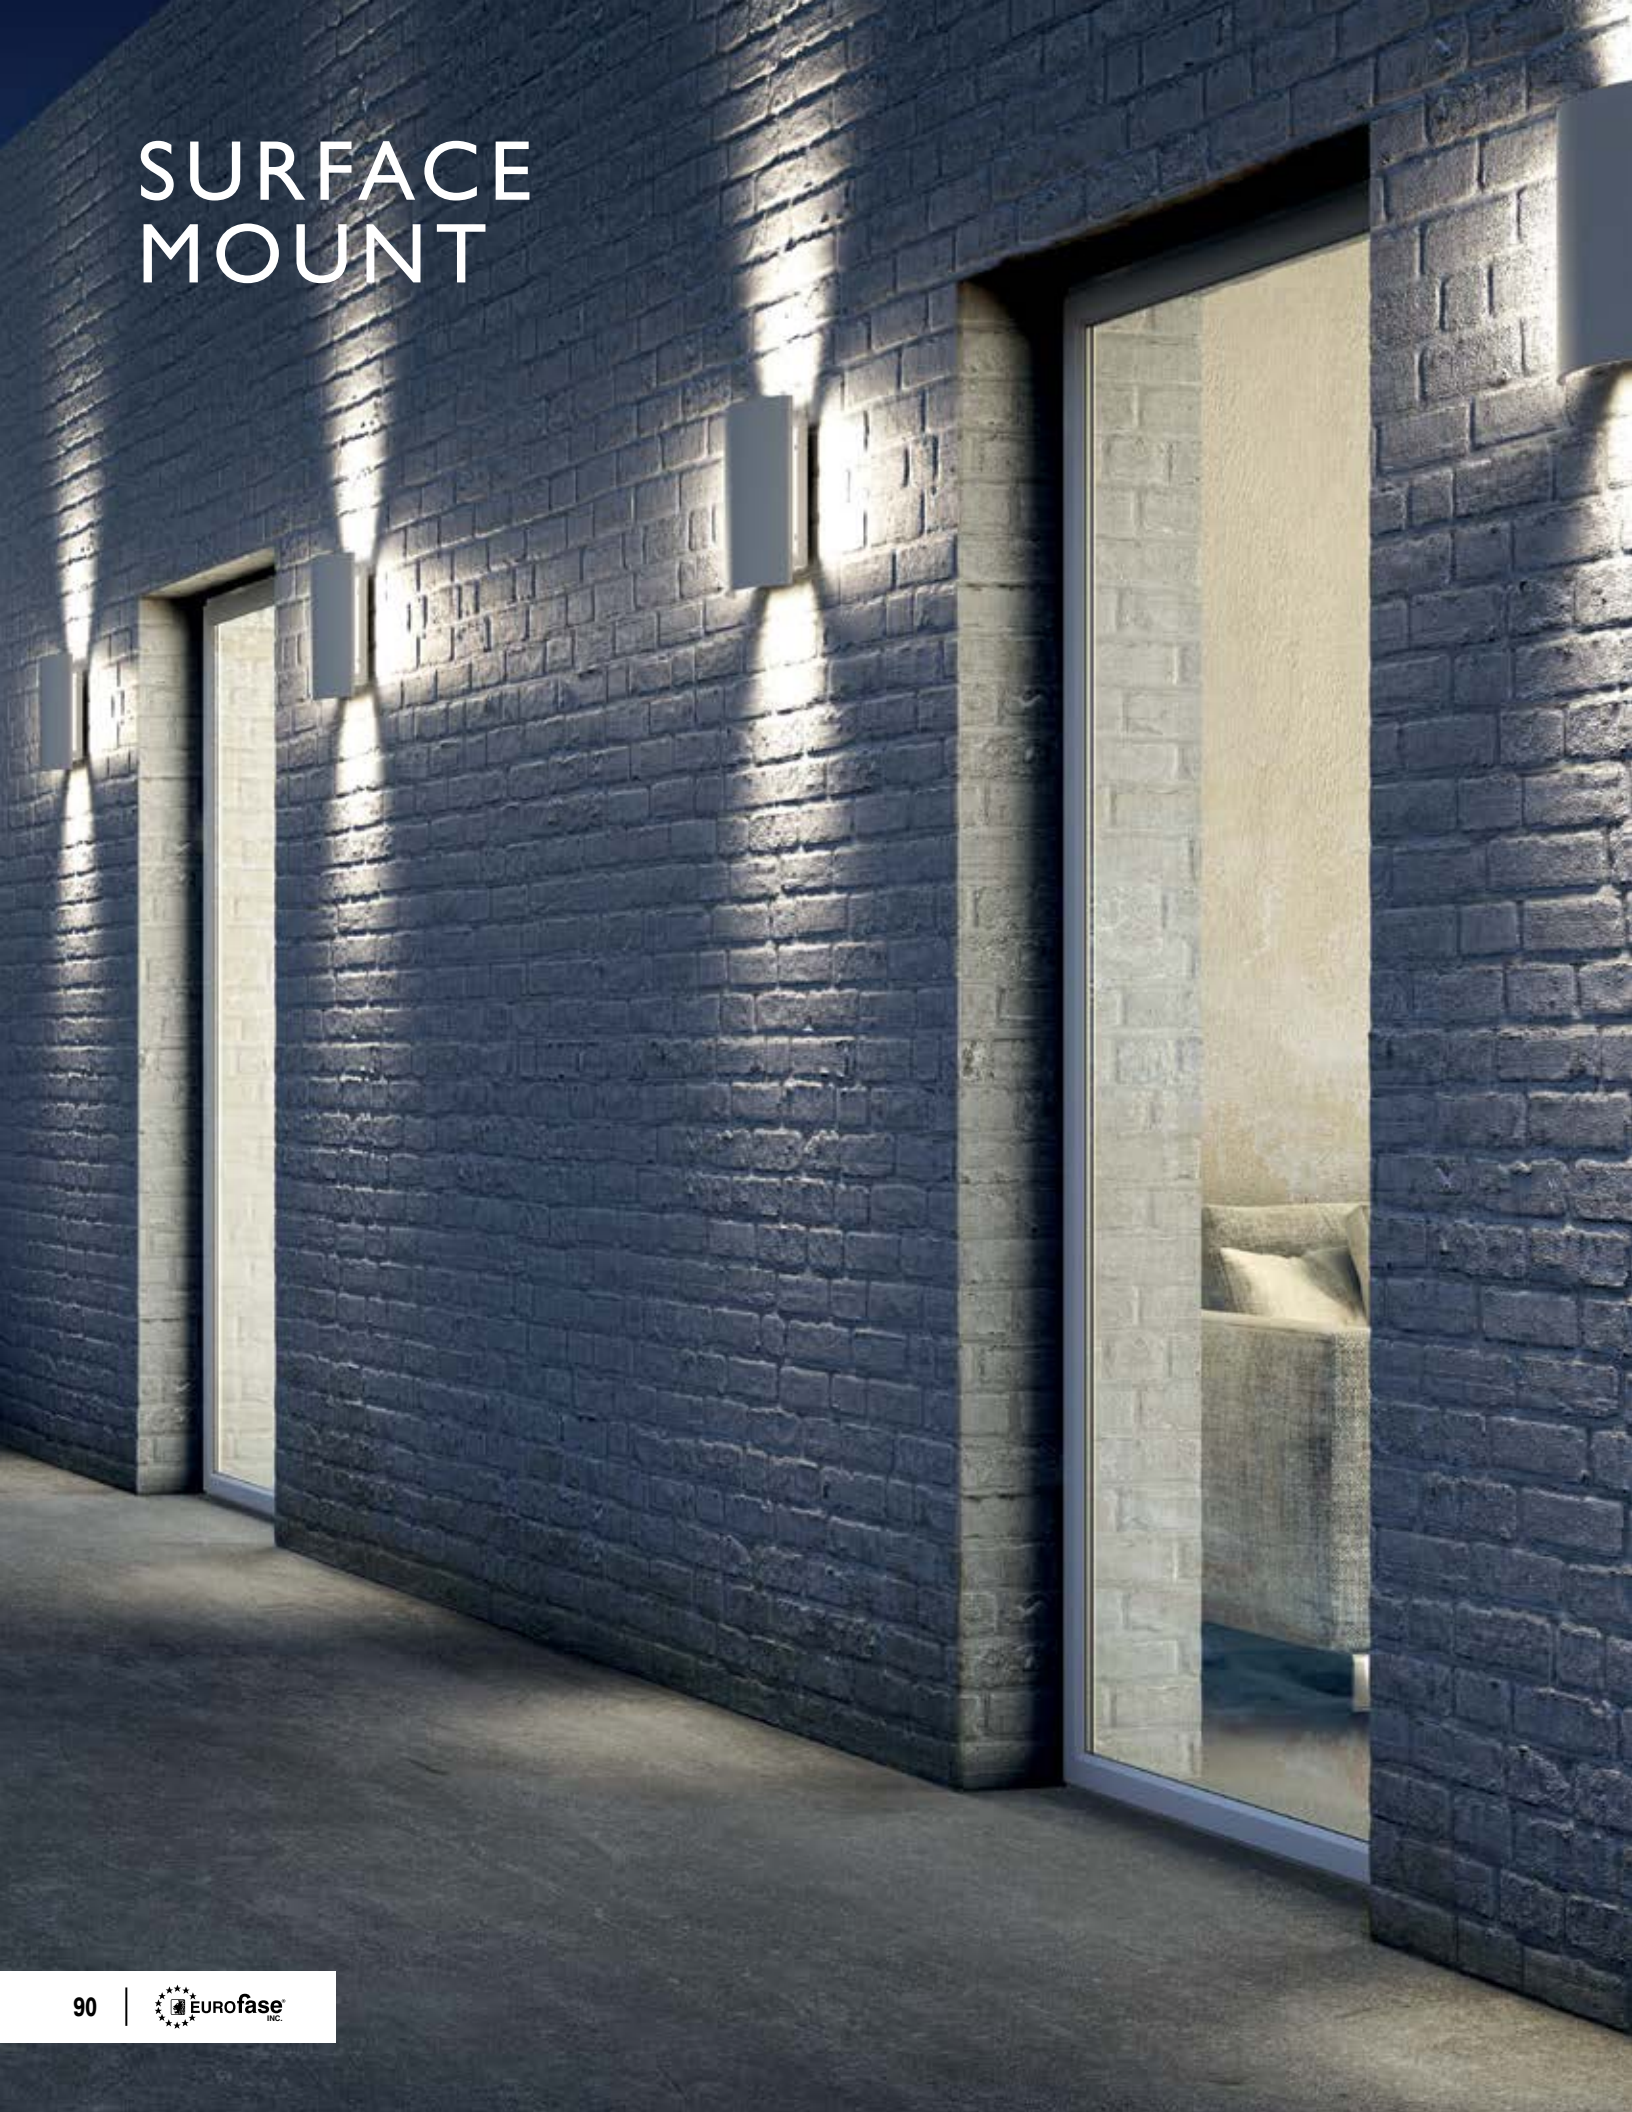

34174-012 MARINE GREY




34174-029 GRAPHITE GREY

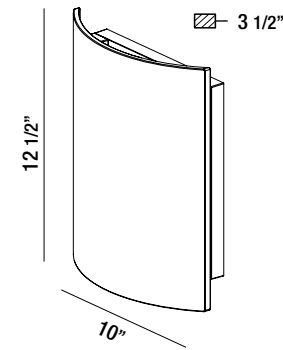

- 1 X 18W CREE LED
- 3000 Kelvin
- Lumen Output: 420lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body


- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design



34175-019 MARINE GREY



34175-026 GRAPHITE GREY



- 18W CREE LED
- 3000 Kelvin
- Lumen Output: 860lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body



- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



up & down light




120V SURFACE MOUNT

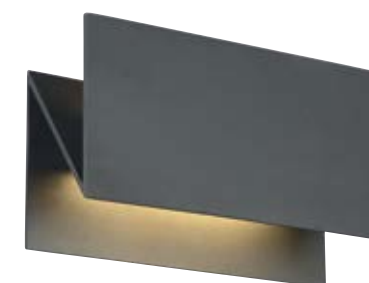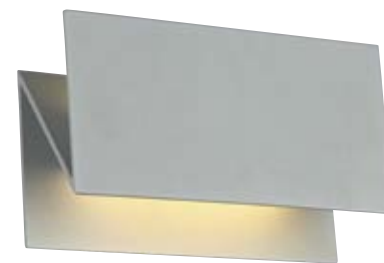

34173-015 MARINE GREY

34173-022 GRAPHITE GREY



- 2 X 7.5W CREE LED
- 3000 Kelvin
- Lumen Output: 650lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box




up & down light



34172-018 MARINE GREY


34172-025 GRAPHITE GREY

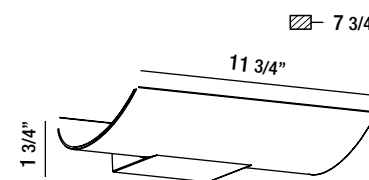

- 1 X 15W CREE LED
- 3000 Kelvin
- Lumen Output: 650lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box






34117-019 GRAPHITE GREY

- 20W CREE LED
- 3000 Kelvin
- Lumen Output: 1000lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design





34118-016 GRAPHITE GREY

- 20W CREE LED
- 3000 Kelvin
- Lumen Output: 1000lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body



- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design






35852-018 GRAPHITE GREY

- 18W LED
- 3000 Kelvin
- Lumen Output: 1100lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 65
- CRI: 90+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Powder coated with pretreatment for outdoor use
- Patented design



35853-015 GRAPHITE GREY



- 13W LED
- 3000 Kelvin
- Lumen Output: 750lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 65
- CRI: 90+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Powder coated with pretreatment for outdoor use
- Patented design



34121-016 GRAPHITE GREY



- 13W CREE LED
- 3000 Kelvin
- Lumen Output: 750lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design




35854-012 GRAPHITE GREY

- 18W LED
- 3000 Kelvin
- Lumen Output: 1100lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 65
- CRI: 90+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Powder coated with pretreatment for outdoor use
- Patented design



35855-019 GRAPHITE GREY

- 10W LED
- 3000 Kelvin
- Lumen Output: 550lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 65
- CRI: 90+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Powder coated with pretreatment for outdoor use
- Patented design


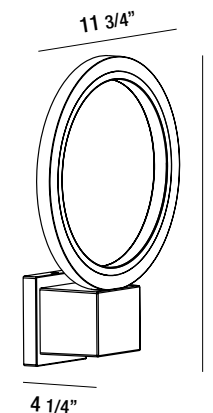


34120-019 GRAPHITE GREY

- 13W CREE LED
- 3000 Kelvin
- Lumen Output: 750lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design




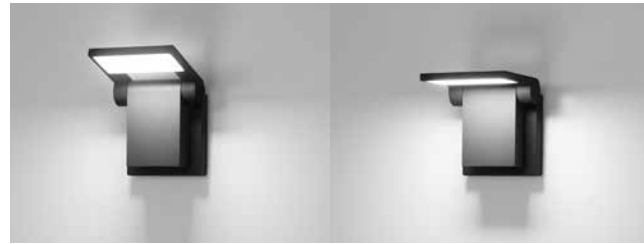

34116-012 GRAPHITE GREY

- 10W LED
- 3000 Kelvin
- Lumen Output: 600lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 90+
- High corrosion resistant die-cast aluminum body


- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design



35856-016 GRAPHITE GREY

- 13W LED
- 3000 Kelvin
- Lumen Output: 750lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 65
- CRI: 90+
- High corrosion resistant die-cast aluminum body


- Stainless steel screws
- Powder coated with pretreatment for outdoor use
- Patented design



35857-013 GRAPHITE GREY

- 10W LED
- 3000 Kelvin
- Lumen Output: 600lm
- LED driver included
- Electronic driver 120V/277V 50/60Hz
- IP 65
- CRI: 90+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Powder coated with pretreatment for outdoor use
- Patented design



34119-013 GRAPHITE GREY


- 10W LED
- 3000 Kelvin
- Lumen Output: 800lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 90+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design






28293-019 MARINE GREY



- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 300lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body

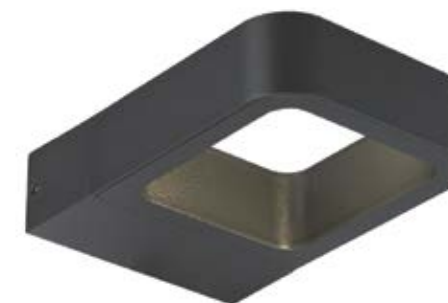


28293-026 GRAPHITE GREY

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



31574-013 MARINE GREY



- 1 X 18W CREE LED
- 3000 Kelvin
- Lumen Output: 570lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body




31574-020 GRAPHITE GREY

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box





31581-011 MARINE GREY





- 4 X 3W CREE LED
- 3000 Kelvin
- Lumen Output: 385lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



up & down light



31589-017 MARINE GREY

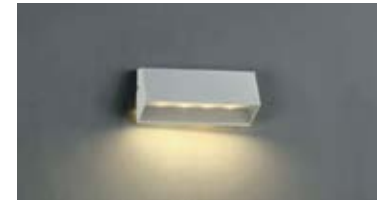


- 4 X 1W CREE LED
- 3000 Kelvin
- Lumen Output: 160lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



31581-028 GRAPHITE GREY




28282-013 MARINE GREY




- 1 X 5W SAMSUNG LED
- 3000 Kelvin
- Lumen Output: 150lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



up & down light

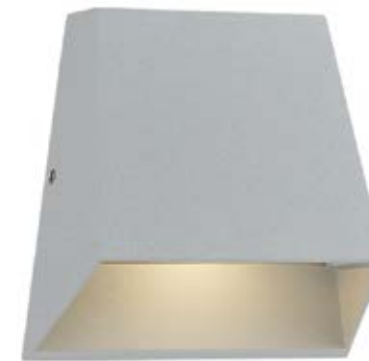


28281-016 MARINE GREY



- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 330lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



28281-023 GRAPHITE GREY




31577-014 MARINE GREY

- 14W CREE LED
- 3000 Kelvin
- Lumen Output: 360lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



31577-021 GRAPHITE GREY



31579-018 MARINE GREY

- 36W CREE LED
- 3000 Kelvin
- Lumen Output: 2230lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box




31579-025 GRAPHITE GREY



up & down light



28288-015 MARINE GREY



- 16 X 1W CREE LED
- 3000 Kelvin
- Lumen Output: 1000lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body




28288-022 GRAPHITE GREY

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



28280-019 MARINE GREY



- 3 X 3W CREE LED
- 3000 Kelvin
- Lumen Output: 260lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body



28280-026 GRAPHITE GREY

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box






28289-012 MARINE GREY



28289-029 GRAPHITE GREY




- 10 X 1W CREE LED
- 3000 Kelvin
- Lumen Output: 360lm
- LED driver included
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Electronic driver 120V 50/60Hz
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design



28275-015 MARINE GREY



28275-022 GRAPHITE GREY




- 10 X 1W CREE LED
- 3000 Kelvin
- Lumen Output: 420lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design





28297-017 MARINE GREY




- 4 X 1W CREE LED
- 3000 Kelvin
- Lumen Output: 320lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



28297-024 GRAPHITE GREY



28296-010 MARINE GREY



- 4 X 1W CREE LED
- 3000 Kelvin
- Lumen Output: 320lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box




28296-027 GRAPHITE GREY



31585-019 MARINE GREY



31585-026 GRAPHITE GREY



- 15W CREE LED
- 3000 Kelvin
- Lumen Output: 740lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box






28284-017 MARINE GREY



28284-024 GRAPHITE GREY



- 2 X 6W CREE LED
- 3000 Kelvin
- Lumen Output: 490lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box




up & down light



28274-018 MARINE GREY



28274-025 GRAPHITE GREY




- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 220lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design



31582-018 MARINE GREY



31582-025 GRAPHITE GREY



- 2 X 3W CREE LED
- 3000 Kelvin
- Lumen Output: 160lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box




up & down light



28279-013 MARINE GREY



28279-020 GRAPHITE GREY



- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 220lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design




120V SURFACE MOUNT



31580-014 MARINE GREY



31580-021 GRAPHITE GREY



- 18W CREE LED
- 3000 Kelvin
- Lumen Output: 660lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box




112 | 120V SURFACE MOUNT



31587-013 MARINE GREY




31587-020 GRAPHITE GREY



- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 350lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body


- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box

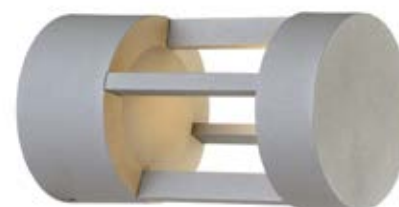

31586-016 MARINE GREY



31586-023 GRAPHITE GREY



- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 350lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box







28278-016 MARINE GREY



28278-023 GRAPHITE GREY



- 2 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 750lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box




up & down light



28277-019 MARINE GREY



28277-026 GRAPHITE GREY




- 1 X 15W CREE LED
- 3000 Kelvin
- Lumen Output: 650lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design



28290-018 MARINE GREY



28290-025 GRAPHITE GREY



- 2 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 870lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box




up & down light



28291-015 MARINE GREY



28291-022 GRAPHITE GREY



- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 470lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box






28295-013 MARINE GREY



28295-020 GRAPHITE GREY



- 2 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 820lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body


- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



28292-012 MARINE GREY



28292-029 GRAPHITE GREY



- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 500lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box






28286-011 MARINE GREY



28286-028 GRAPHITE GREY



- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 450lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body


- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



31578-011 MARINE GREY



31578-028 GRAPHITE GREY



- 1 X 9W CREE LED
- 3000 Kelvin
- Lumen Output: 650lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body


- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



28287-018 MARINE GREY



28287-025 GRAPHITE GREY



- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 480lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body

- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box






28285-014 MARINE GREY



28285-021 GRAPHITE GREY




- 2 X 5W CREE LED
- 3000 Kelvin
- Lumen Output: 620lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box




28276-012 MARINE GREY



28276-029 GRAPHITE GREY




- 1 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 350lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box

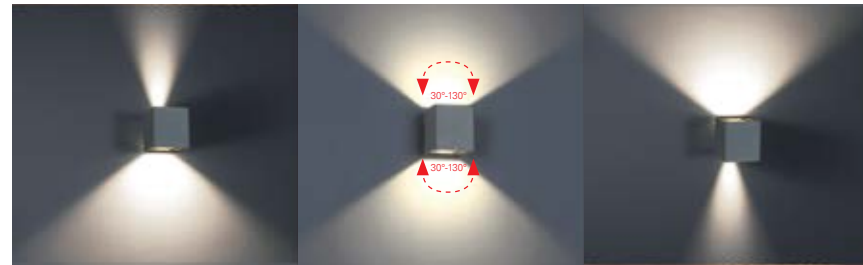

28283-010 MARINE GREY




28283-027 GRAPHITE GREY




- 6W CREE LED
- 3000 Kelvin
- Lumen Output: 220lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



31583-015 MARINE GREY

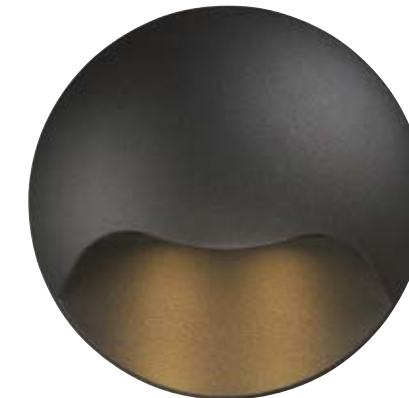


31583-022 GRAPHITE GREY




- 2 X 3W CREE LED
- 3000 Kelvin
- Lumen Output: 260lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



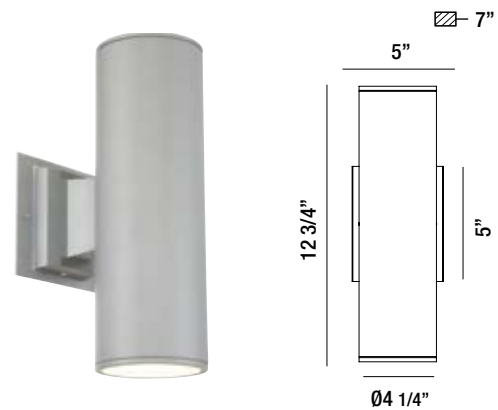


30349-018 MARINE GREY

- 2 X 10W CREE LED
- 3000 Kelvin
- Lumen Output: 1500lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box

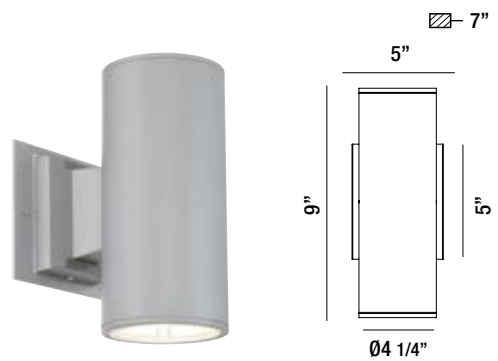


30347-014 MARINE GREY

- 1 X 10W CREE LED
- 3000 Kelvin
- Lumen Output: 750lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box

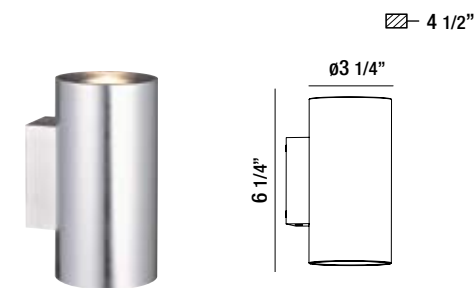

28301-011 ALUMINUM


- 2 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 830lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant extrusion aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box

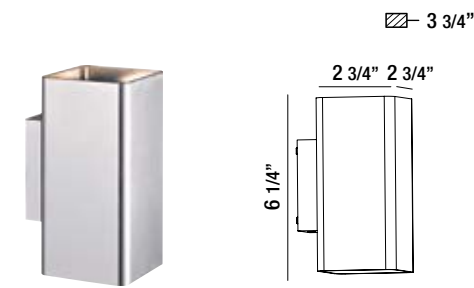

28302-018 ALUMINUM

- 2 X 7W CREE LED
- 3000 Kelvin
- Lumen Output: 830lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant extrusion aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design
- Cover plate included for standard junction box



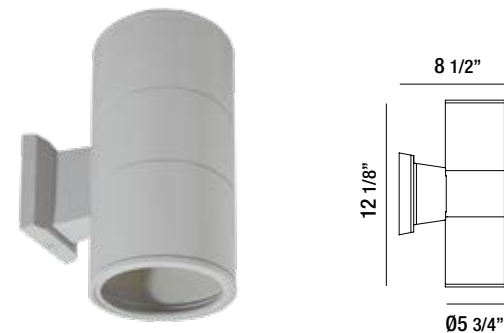


19204-017 MARINE GREY

- 2 x 75W max PAR30 120V
- IP 55
- Cylinder wall light for up and down lighting
- Exterior grade, cast aluminum construction with powder coated finish
- Completely enclosed unit with clear glass lens



19202-013 MARINE GREY

- 1 x 75W max PAR30 120V
- IP 55
- Cylinder wall light for down lighting
- Exterior grade, cast aluminum construction with powder coated finish
- Completely enclosed unit with clear glass lens

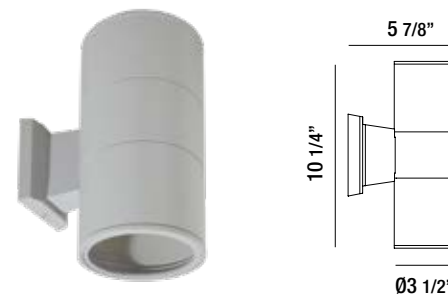

19205-014 MARINE GREY

- 2 x 50W max PAR20 120V
- IP 55
- Cylinder wall light for up and down lighting
- Exterior grade, cast aluminum construction with powder coated finish
- Completely enclosed unit with clear glass lens



19206-011 MARINE GREY

- 1 x 50W max PAR20 120V
- IP 55
- Cylinder wall light for down lighting
- Exterior grade, cast aluminum construction with powder coated finish
- Completely enclosed unit with clear glass lens




19203-010 MARINE GREY

- 2 x 50W max GU10 120V
- IP 55
- Cylinder wall light for up and down lighting
- Exterior grade, cast aluminum construction with powder coated finish
- Completely enclosed unit with clear glass lens



19201-016 MARINE GREY

- 1 x 50W max GU10 120V
- IP 55
- Cylinder wall light for down lighting
- Exterior grade, cast aluminum construction with powder coated finish
- Completely enclosed unit with clear glass lens




19210-018 MARINE GREY

- 2 x 75W max PAR30 120V
- IP 55
- Square wall light for up and down lighting
- Exterior grade, cast aluminum construction with powder coated finish
- Completely enclosed unit with clear glass lens




up & down light



19208-015 MARINE GREY

- 1 x 75W max PAR30 120V
- IP 55
- Square wall light for down lighting
- Exterior grade, cast aluminum construction with powder coated finish
- Completely enclosed unit with clear glass lens




19209-012 MARINE GREY

- 2 x 50W max GU10 120V
- IP 55
- Square wall light for up and down lighting
- Exterior grade, cast aluminum construction with powder coated finish
- Completely enclosed unit with clear glass lens




up & down light



19207-018 MARINE GREY


- 1 x 50W max GU10 120V
- IP 55
- Square wall light for down lighting
- Exterior grade, cast aluminum construction with powder coated finish
- Completely enclosed unit with clear glass lens

IN-WALL

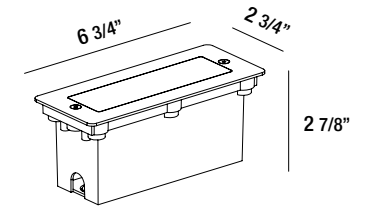


31592-017

- 3W LED
- 3000 Kelvin
- Lumen Output: 105lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- Tempered safety glass




MAX 500 kg

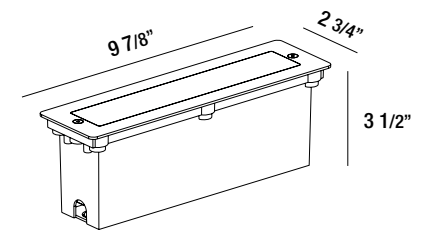

31591-010


- 5W LED
- 3000 Kelvin
- Lumen Output: 184lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- Stainless steel ring AISI 304
- Stainless steel screws
- Silicone rubber gasket
- Max static weight resistant 500kg
- Polypropylene housing for recess included (concrete pour)
- Tempered safety glass



MAX 500 kg



31576-017 MARINE GREY




31576-024 GRAPHITE GREY

- 8.5W CREE LED
- 3000 Kelvin
- Lumen Output: 190lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design



31590-013 MARINE GREY



31590-020 GRAPHITE GREY

- 3.6W CREE LED
- 3000 Kelvin
- Lumen Output: 80lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Electronic driver 120V 50/60Hz
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design






**28294-016
MARINE GREY**



**28294-023
GRAPHITE GREY**

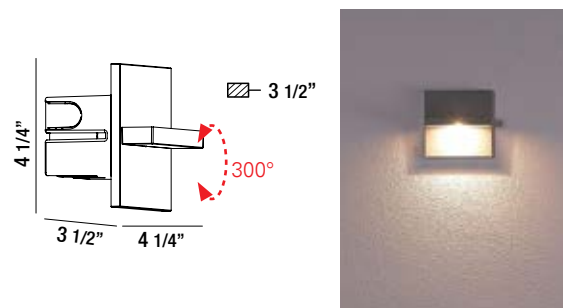

- 1 X 3W CREE LED
- 3000 Kelvin
- Lumen Output: 90lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Patented design





**36051-014
BRUSHED NICKEL**



**36051-022
BLACK**



**36051-039
WHITE**



- 2.2W LED
- 3000 Kelvin
- Lumen Output: 145lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum trim
- Screwless trim
- PU form gasket
- Powder coated with pretreatment for outdoor use
- Mounts in standard 2" x 3" switch box
- Triac dimming





**36046-010
BRUSHED NICKEL**



**36046-025
BLACK**




**36046-037
WHITE**



- 2W LED
- 3000 Kelvin
- Lumen Output: 145lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum trim
- Screwless trim
- PU form gasket
- Powder coated with pretreatment for outdoor use
- Mounts in standard 2" x 3" switch box
- Triac dimming




***INTERIOR AND EXTERIOR APPLICATION**

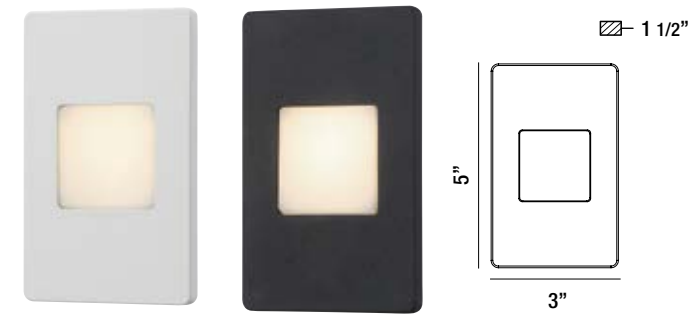


30286-016 WHITE
30286-023 BLACK

- 1 X 3W LED
- 3000 Kelvin
- Lumen Output: 120lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Mounts in standard 2" x 3" switch box

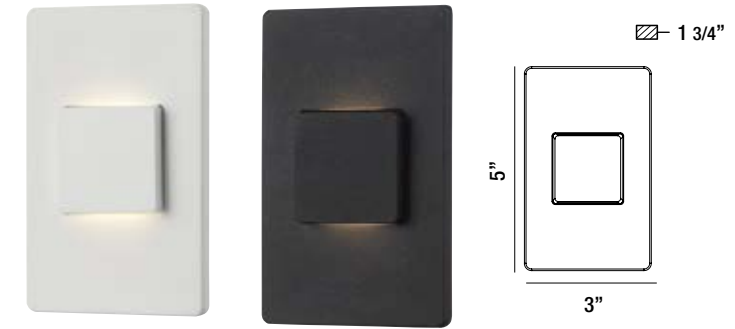

30287-013 WHITE
30287-020 BLACK

- 1 X 3W LED
- 3000 Kelvin
- Lumen Output: 120lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Mounts in standard 2" x 3" switch box

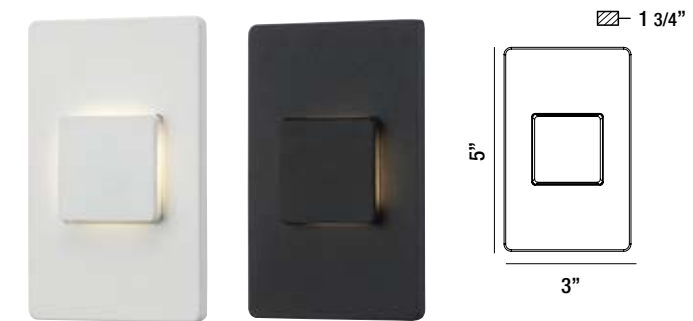


30288-010 WHITE
30288-027 BLACK

- 1 X 3W LED
- 3000 Kelvin
- Lumen Output: 120lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Mounts in standard 2" x 3" switch box



30289-017 WHITE
30289-024 BLACK

- 1 X 3W LED
- 3000 Kelvin
- Lumen Output: 120lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated with pretreatment for outdoor use
- Mounts in standard 2" x 3" switch box

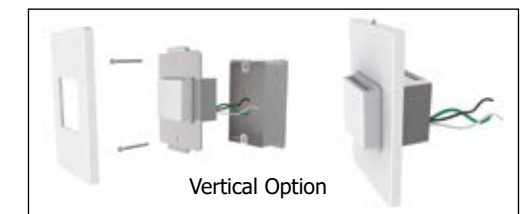

*INTERIOR AND EXTERIOR APPLICATION




**36041-015
BRUSHED NICKEL**



**36041-020
BLACK**




**36041-034
WHITE**



5 1/4"

3 5/16"



1 7/8"

- 2W LED
- 3000 Kelvin
- Lumen Output: 145lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum trim
- Louvered trim
- PU form gasket
- Powder coated with pretreatment for outdoor use
- Mounts in standard 2" x 3" switch box
- Triac dimming



**36038-015
BRUSHED NICKEL**



**36038-026
BLACK**



**36038-032
WHITE**




**36033-010
BRUSHED NICKEL**




**36033-023
BLACK**



**36033-038
WHITE**




Ø4 3/4"




1 1/2"

- 2.5W LED
- 3000 Kelvin
- Lumen Output: 175lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum trim
- Louvered trim
- PU form gasket
- Powder coated with pretreatment for outdoor use
- Triac dimming



3 1/8"

5 1/8"




2 5/8"

- 2.2W LED
- 3000 Kelvin
- Lumen Output: 145lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 67
- CRI: 80+
- High corrosion resistant die-cast aluminum trim
- PU form gasket
- Powder coated with pretreatment for outdoor use
- Mounts in standard 2" x 3" switch box
- Triac dimming



120V IN-WALL

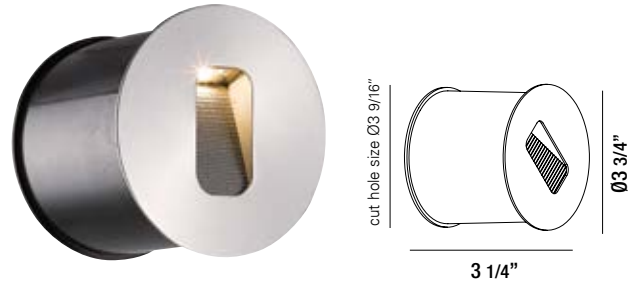

32148-015

- 1 X 3W CREE LED
- 3000 Kelvin
- Lumen Output: 60lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phosphochromating pre-finish
- Stainless steel ring AISI 304
- Clear tempered glass
- Silicone rubber gasket
- Polypropylene housing for recess included



32149-012

- 1 X 3W CREE LED
- 3000 Kelvin
- Lumen Output: 60lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phosphochromating pre-finish
- Stainless steel ring AISI 304
- Clear tempered glass
- Silicone rubber gasket
- Polypropylene housing for recess included



32150-018

- 1 X 3W CREE LED
- 3000 Kelvin
- Lumen Output: 60lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phosphochromating pre-finish
- Stainless steel ring AISI 304
- Clear tempered glass
- Silicone rubber gasket
- Polypropylene housing for recess included




32151-015

- 1 X 3W CREE LED
- 3000 Kelvin
- Lumen Output: 60lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 65
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Polyester painting with phosphochromating pre-finish
- Stainless steel ring AISI 304
- Clear tempered glass
- Silicone rubber gasket
- Polypropylene housing for recess included




14751-011
STAINLESS STEEL

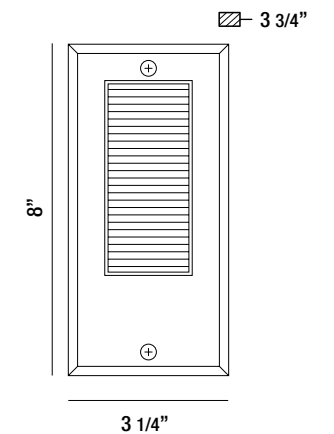


- 1 X 0.4W CREE LED
- 3000 Kelvin
- Lumen Output: 420lm
- LED driver included
- Electronic driver 120V 50/60Hz
- IP 54
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Stainless steel face plate
- Patented design



LED SCONCE/SIGN

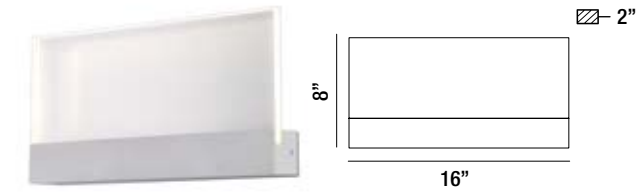

31437-011
LARGE LED OUTDOOR SIGN
6 x 1W/LED 4000K/600lm

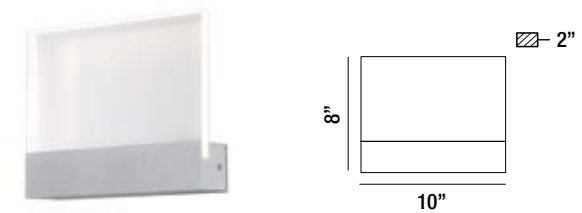

31436-014
MEDIUM LED OUTDOOR SIGN
4 x 1W/LED 4000K/400lm





31435-017
SMALL LED OUTDOOR SIGN
3 x 1W/LED 4000K/300lm



MOUNTS IN STANDARD 2" X 3" SWITCH BOX
(NOT INCLUDED)

* CONTACT EUROFASE FOR CUSTOM DESIGNS

COMMERCIAL

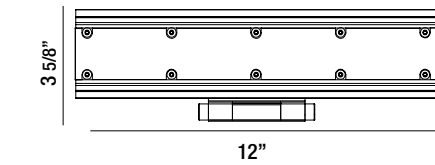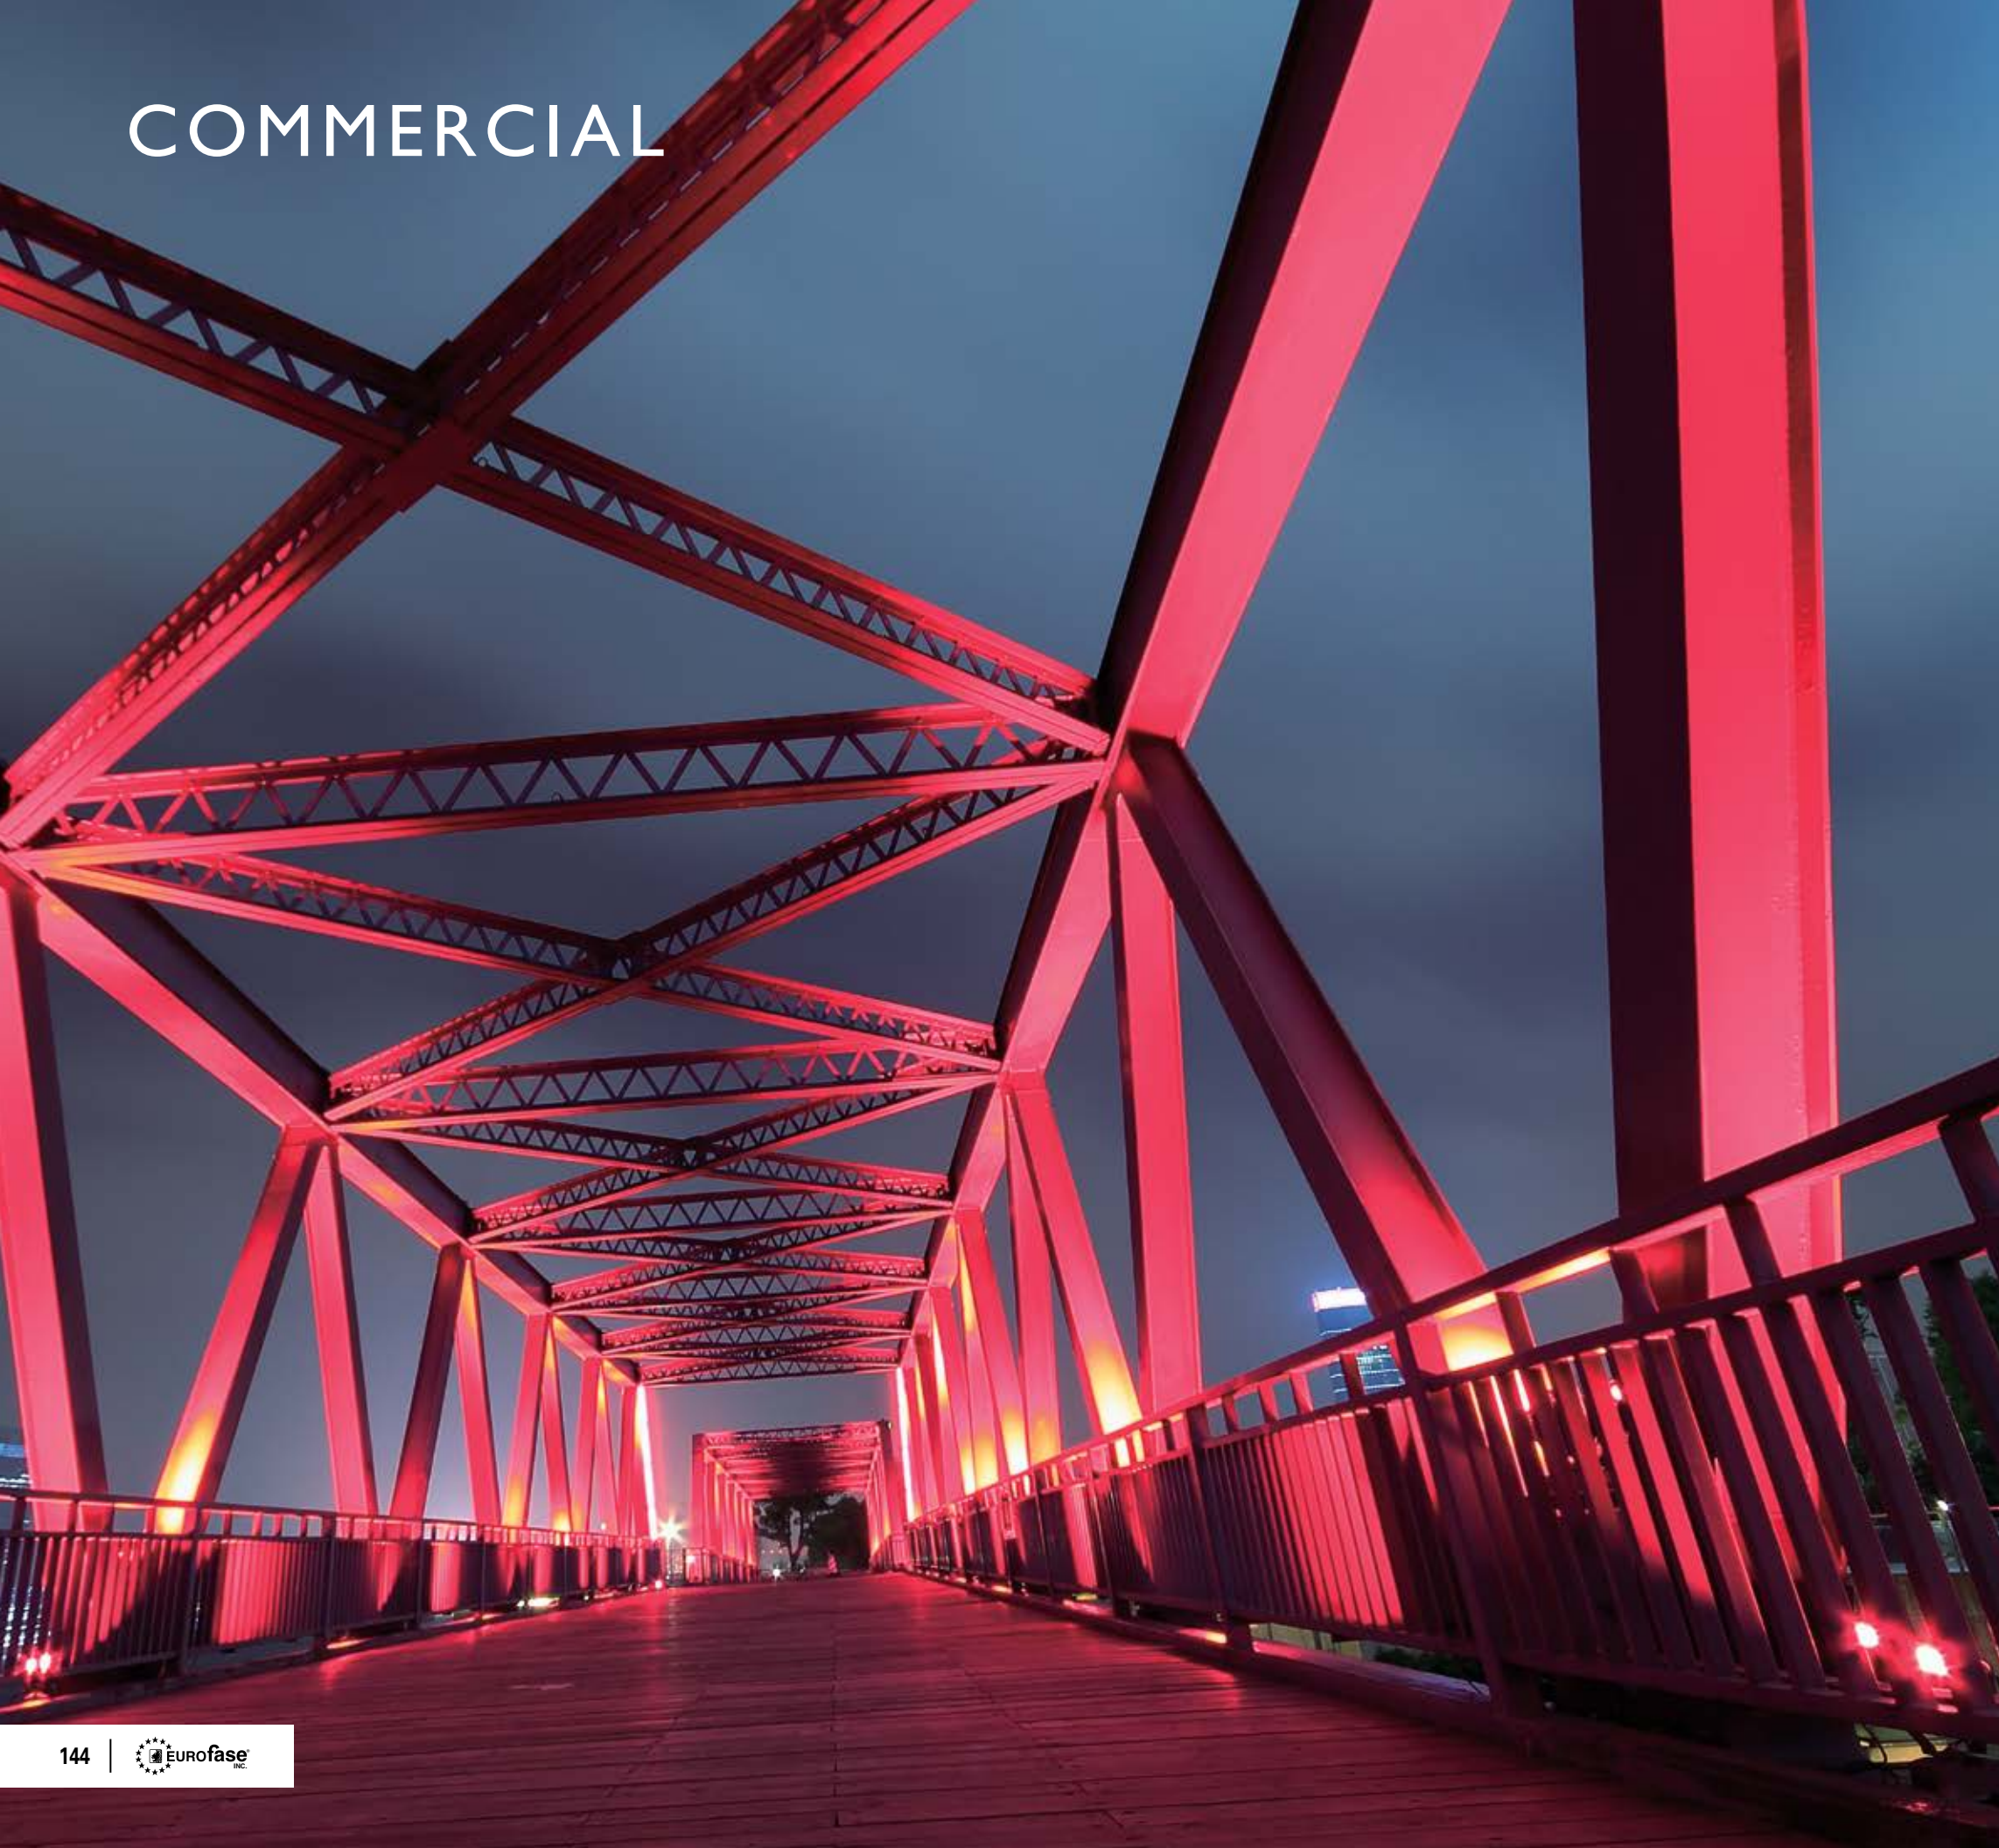


22534-019


- 12 x 1W LED flood light
- 3000 Kelvin
- Lumen Output: 852lm
- Built-in LED driver
- IP 66
- CRI: 80+
- High corrosion resistant die-cast aluminum body
- Stainless steel screws
- Silicone rubber gasket
- Powder coated finish



Input Power:
100V-240V




Linkable capacity up to
40 units or 500W max

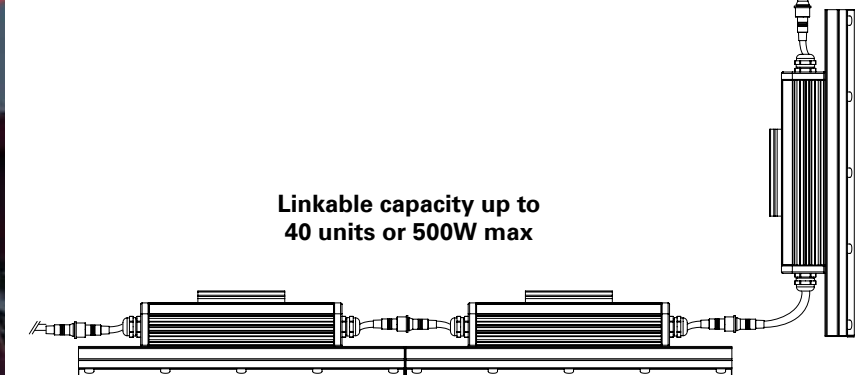

24424-011


43" DOUBLE END PLUG-IN CONNECTOR CABLE



6 1/2"

26078-014



- 12W LED
- Lumen Output: 850lm
- 5000K
- CRI:72+
- 120V
- UL and CUL listed for wet locations
- IP 66, dust and water jet tight
- Corrosion resistant die-cast all aluminum construction
- Superior powder coated finish
- Corrosion resistant hardware
- High impact polycarbonate lens
- Weatherproof and durable silicone rubber gaskets keep water and insects out



7 5/16"

26079-011

- 12W LED
- Lumen Output: 850lm
- 5000K
- CRI:72+
- 120V
- Unique design
- UL and CUL listed for wet locations
- IP 65
- Corrosion resistant die-cast all aluminum construction
- Superior powder coated finish
- Heavy duty polycarbonate lens

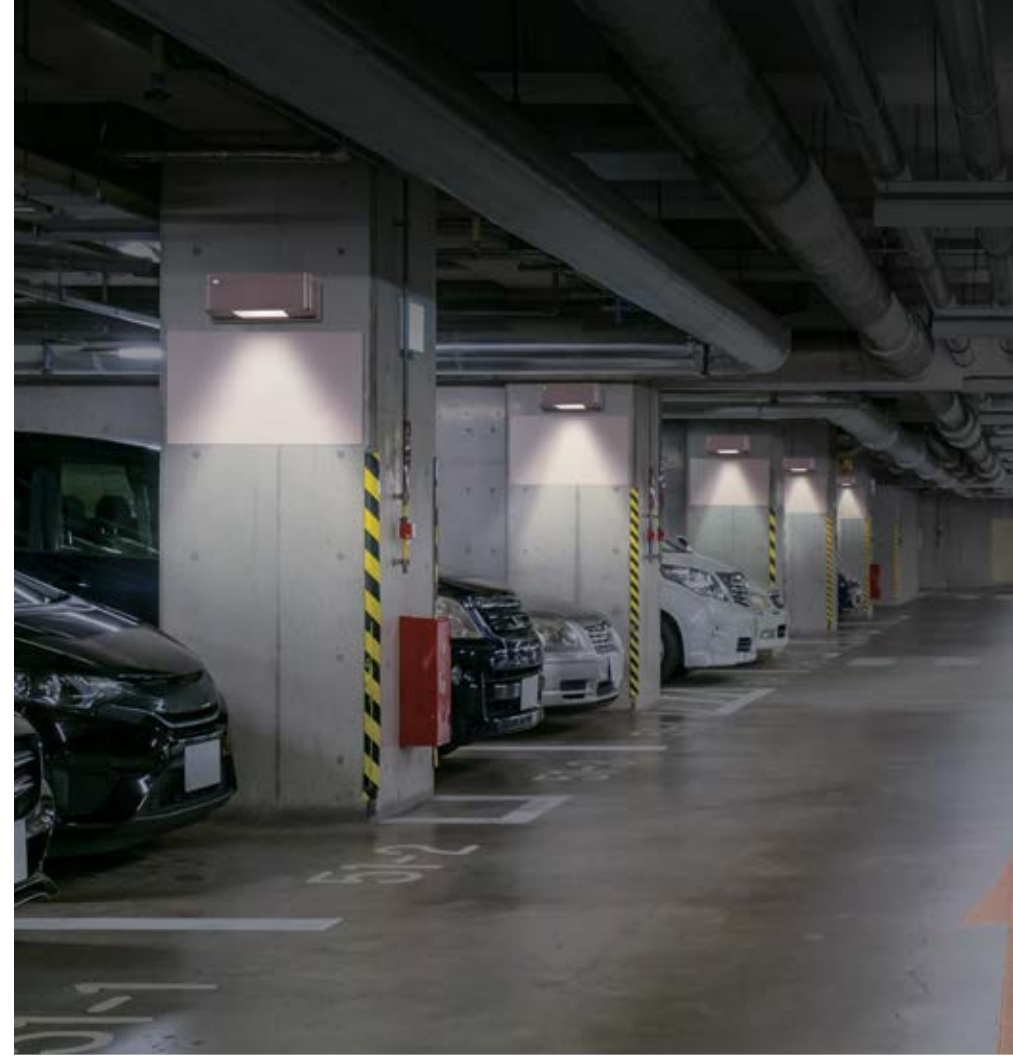

12 3/8"

23437-012

- 10W CREE LED
- Lumen Output: 600lm
- 4700K
- CRI: 80+
- 120V/277V
- Parking areas, entrances, walkways, underpasses, schools, garages and recreation areas
- UL listed / CUL listed for wet locations
- Heavy duty die-cast aluminum powder coated construction
- Heat and impact resistant tempered glass lens
- Dark architectural bronze color
- Powder coated finish
- Silicone rubber included to prevent any leakage from the outside
- One piece anodized aluminum designed reflector for best light efficiency



6 1/4"


6 1/4"

13 7/8"

23250-017


- 10W CREE LED
- Lumen Output: 680lm
- 4700K
- CRI: 80+
- 120V/277V
- Die cast housing
- Architectural bronze UV resistant powder coated finish
- UL listed / CUL listed for wet locations
- Low Tj for long life, low lumen depreciation
- Lumen per LED - approx. 90~95
- Low starting temp -30°C
- IC current controlled LED circuits






23251-014

- 20W CREE LED
- Lumen Output: 2560lm
- 4700K
- CRI: 80+
- Efficient general ceiling lighting
- Die cast housing
- Architectural bronze UV resistant powder coated finish
- UL listed / CUL listed for wet locations
- Low Tj for long life, low lumen depreciation

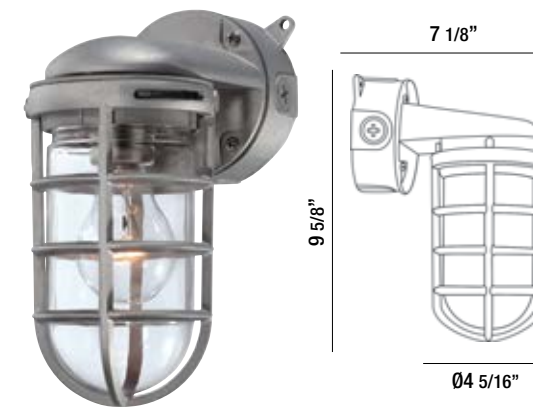


23264-014

- 1 x 100W/E26/120V (included)
- UL listed / CUL listed for wet locations
- Heavy duty die-cast aluminum with powder coated finish
- Clear heat resistant tempered glass lens
- High temperature silicone internal gaskets
- 1/2" tapped holes available for through branch circuit wiring
- UL listed porcelain medium base socket

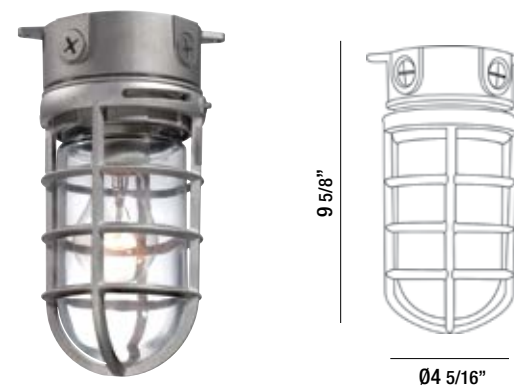

23265-011

- 1 x 100W/E26/120V (included)
- UL listed / CUL listed for wet locations
- Heavy duty die-cast aluminum with powder coated finish
- Clear heat resistant tempered glass lens
- High temperature silicone internal gaskets
- 1/2" tapped holes available for through branch circuit wiring
- UL listed porcelain medium base socket

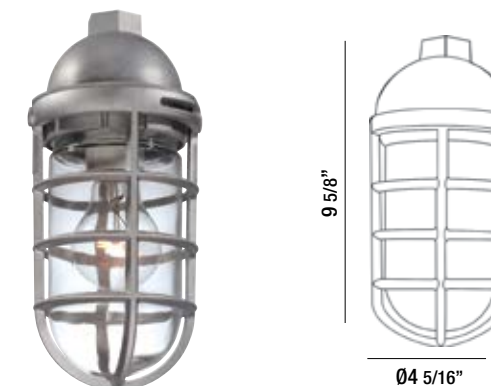


23266-018

- 1 x 100W/E26/120V (included)
- UL listed / CUL listed for wet locations
- Heavy duty die-cast aluminum with powder coated finish
- Clear heat resistant tempered glass lens
- High temperature silicone internal gaskets
- 1/2" tapped holes available for through branch circuit wiring
- UL listed porcelain medium base socket




DECORATIVE



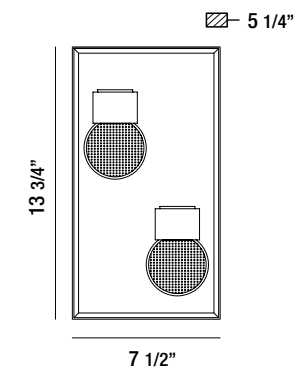


35933-014
ANTIQUE GREY

2-LIGHT OUTDOOR WALL SCONCE
2 x 4.5W/LED 3000K/540lm
(dimnable)

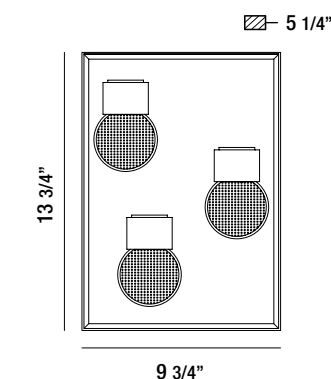

35934-011
ANTIQUE GREY


3-LIGHT OUTDOOR WALL SCONCE
3 x 4.5W/LED 3000K/810lm
(dimnable)

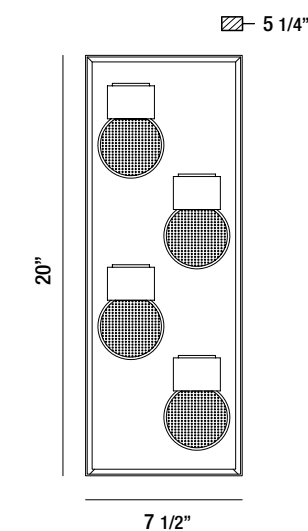


35935-018
ANTIQUE GREY

4-LIGHT OUTDOOR WALL SCONCE
4 x 4.5W/LED 3000K/1080lm
(dimnable)




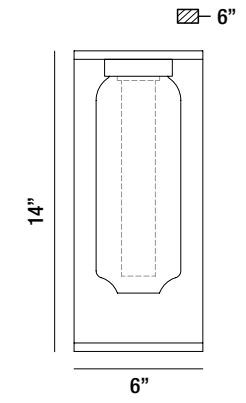


35951-018
ANTIQUE GREY
LARGE OUTDOOR LED WALL SCONCE
5W/LED 3000K/350lm
(dimmable)




35950-011
ANTIQUE GREY
SMALL OUTDOOR LED WALL SCONCE
5W/LED 3000K/350lm
(dimmable)



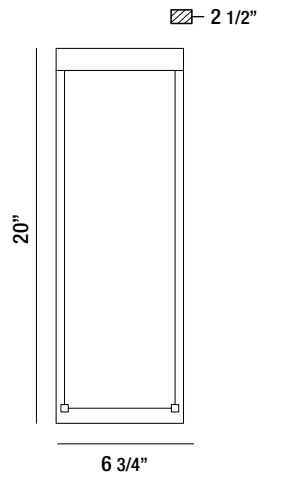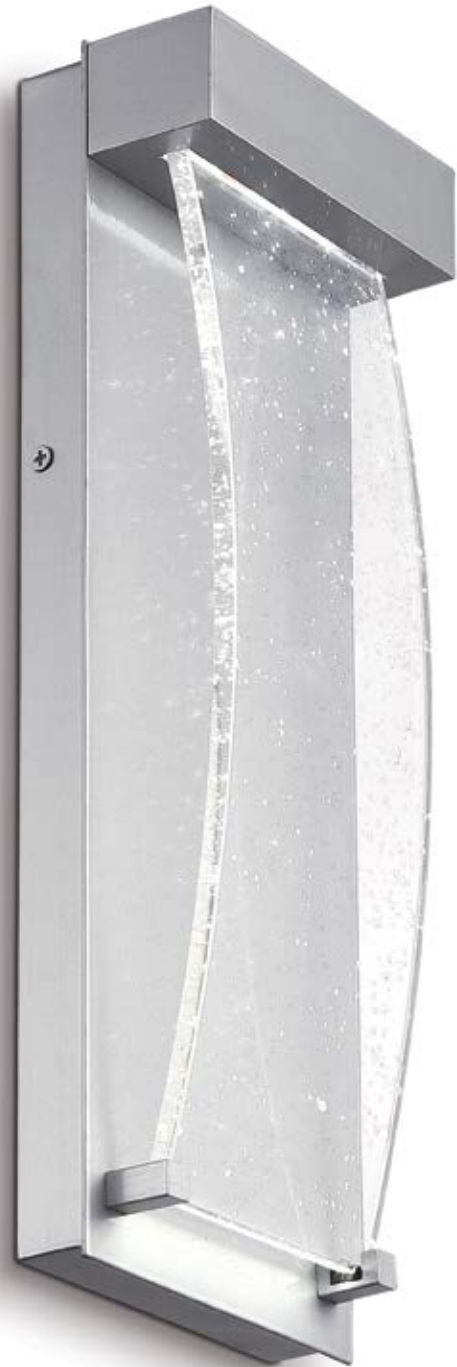

35888-017 BLACK
35888-024 BRUSH SILVER



LARGE OUTDOOR LED WALL SCONCE
 10W/LED 3000K/600lm

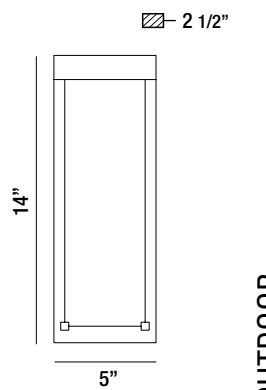

35887-010 BLACK
35887-027 BRUSH SILVER


SMALL OUTDOOR LED WALL SCONCE
 6W/LED 3000K/400lm



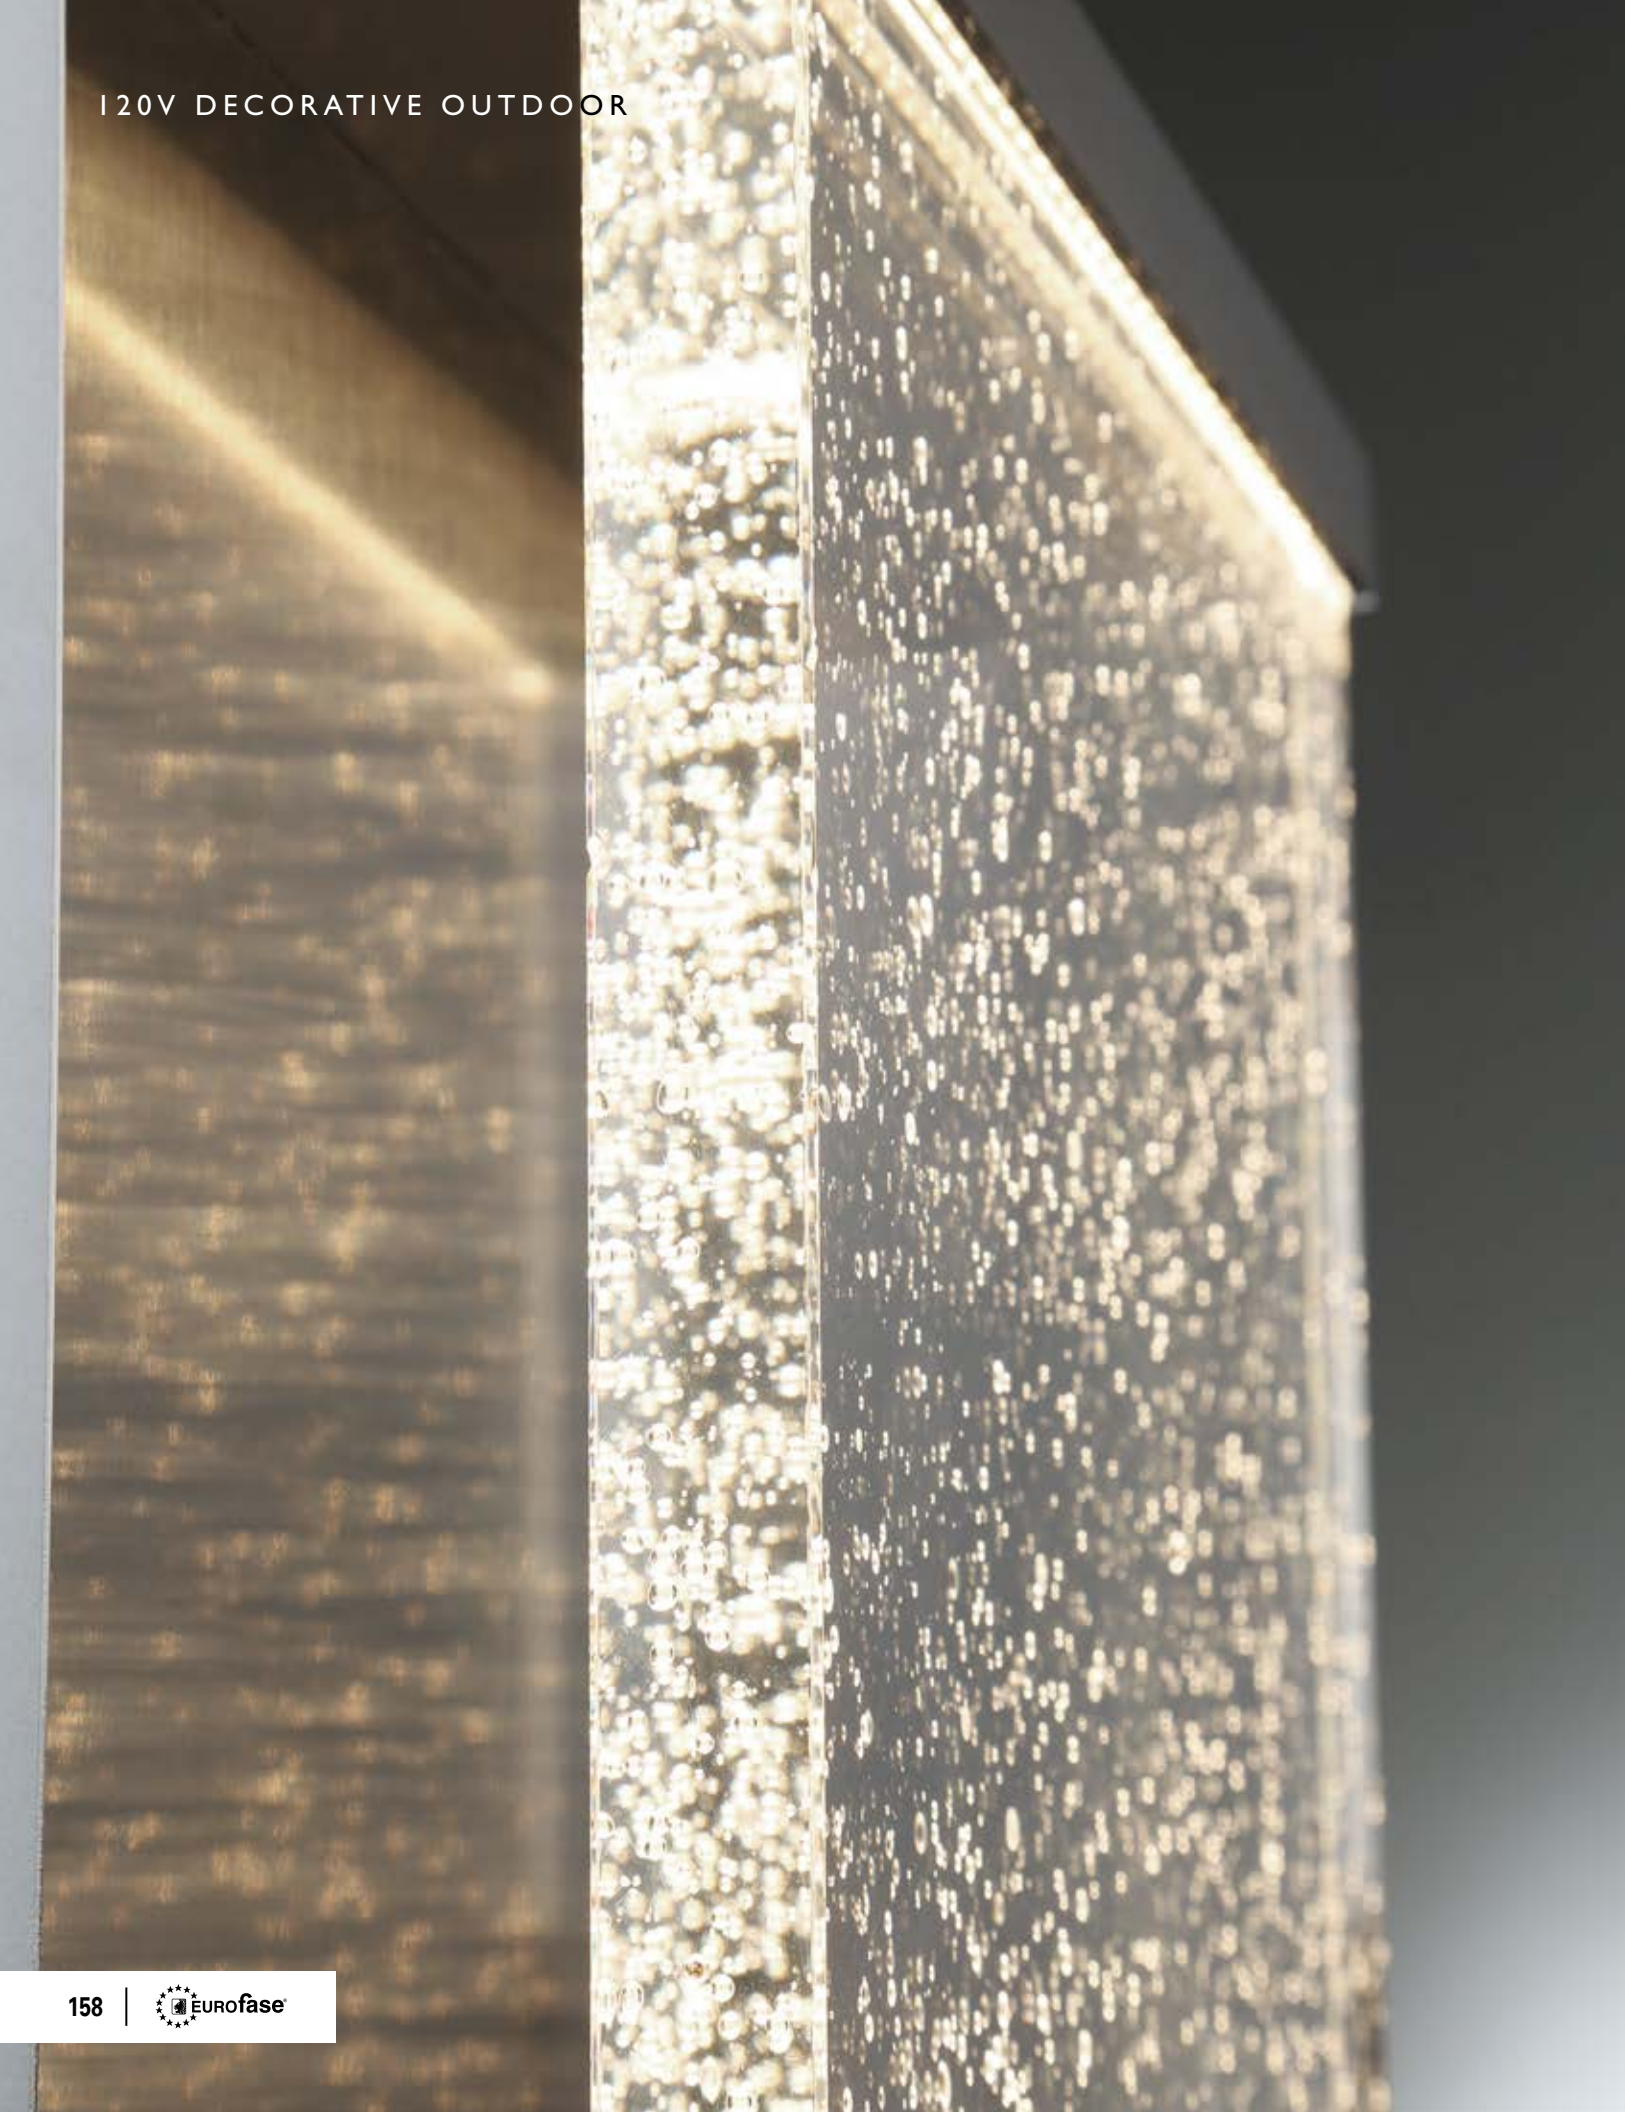


34139-011
SATIN NICKEL

SQUARE OUTDOOR LED FLUSHMOUNT
2 x 10W/LED 3000K/1200lm
(dimnable)



34137-017
SATIN NICKEL


SMALL OUTDOOR LED WALL SCNCE
2 x 10W/LED 3000K/1200lm
(dimnable)

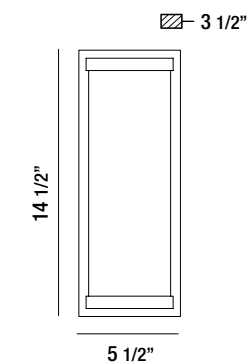


34138-014
SATIN NICKEL

LARGE OUTDOOR LED SURFACEMOUNT
2 x 10W/LED 3000K/1200lm
(dimnable)



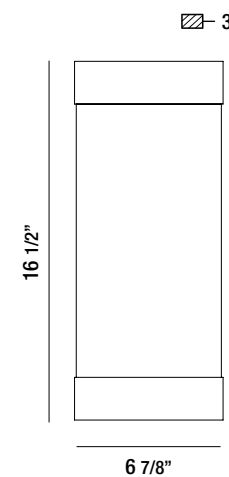


35892-014
BLACK
LARGE OUTDOOR LED WALL SCONCE
2 x 10W/LED 3000K/1200lm



35891-017
BLACK
SMALL OUTDOOR LED WALL SCONCE
10W/LED 3000K/600lm




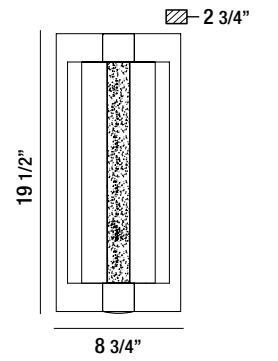

**35947-011
BLACK**
LARGE OUTDOOR LED WALL SCNCE
3 x 4.5W/LED 3000K/840lm
(dimmable)





up & down light



**35946-014
BLACK**
SMALL OUTDOOR LED WALL SCNCE
2 x 4.5W/LED 3000K/540lm
(dimmable)



up & down light

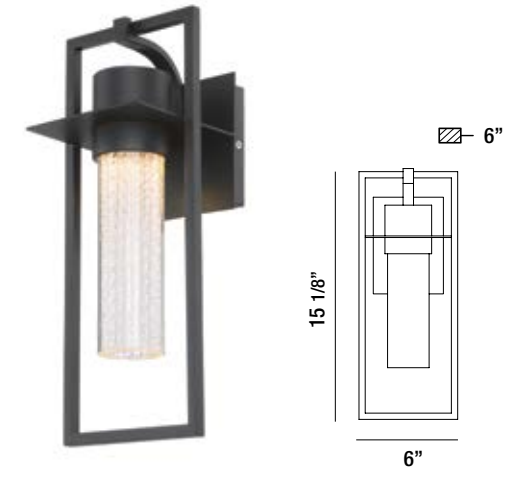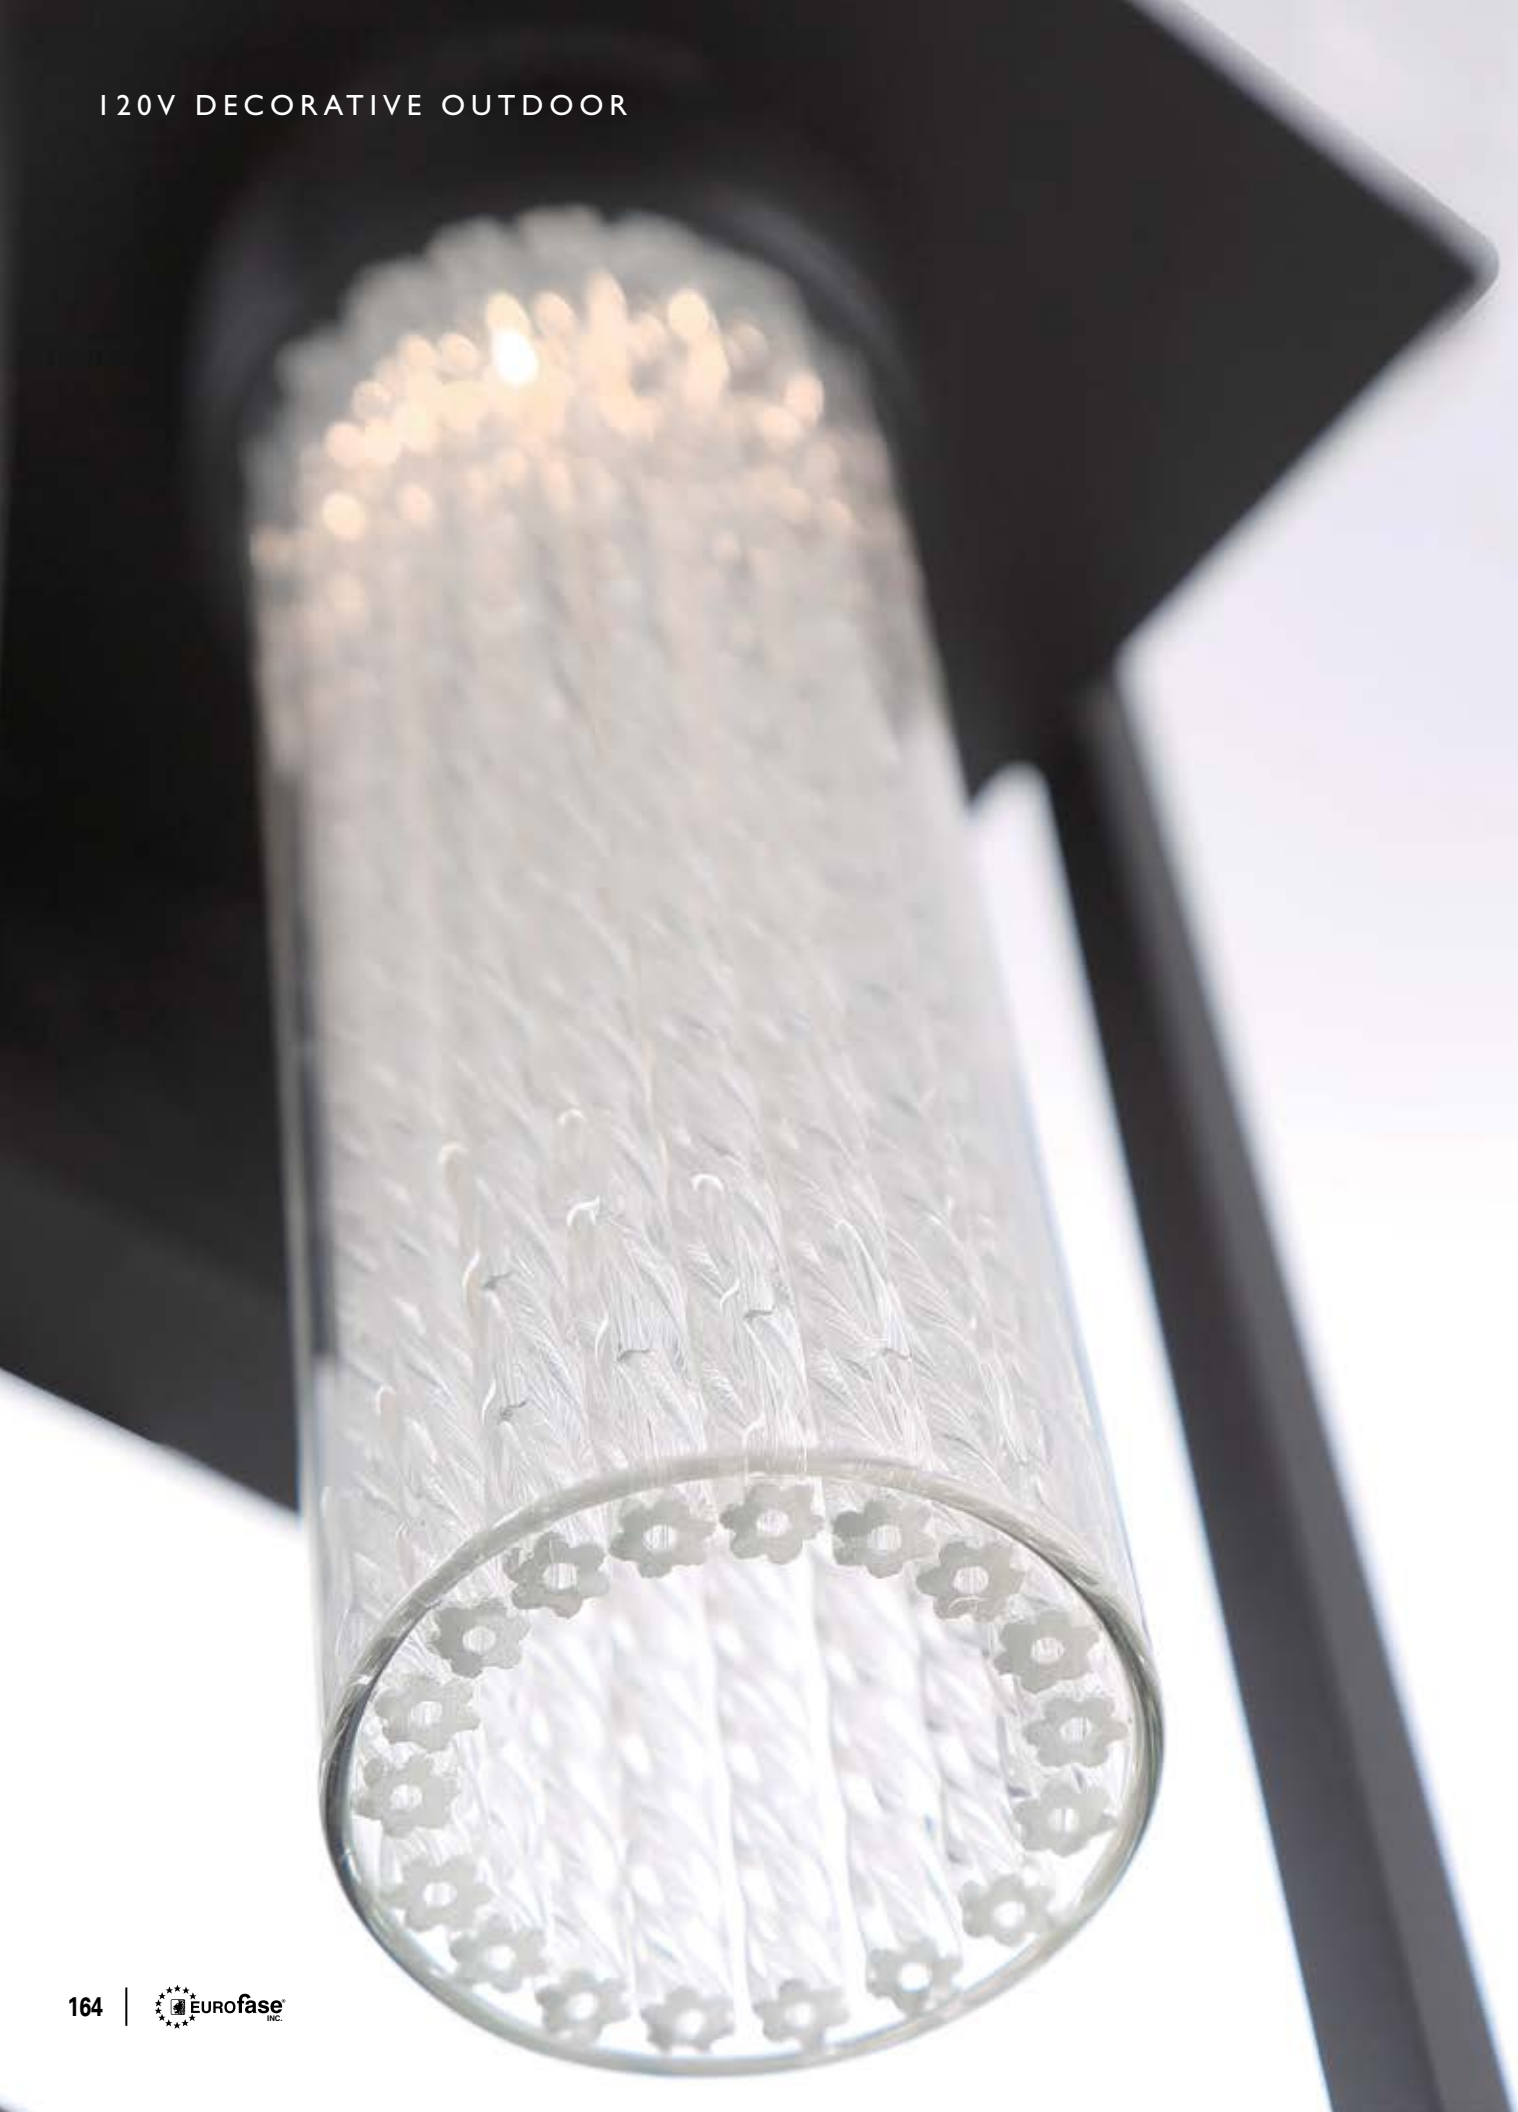


35890-010
BLACK
SMALL OUTDOOR LED WALL SCONCE
6W/LED 3000K/360lm




35889-014
BLACK
LARGE OUTDOOR LED WALL SCONCE
11W/LED 3000K/660lm



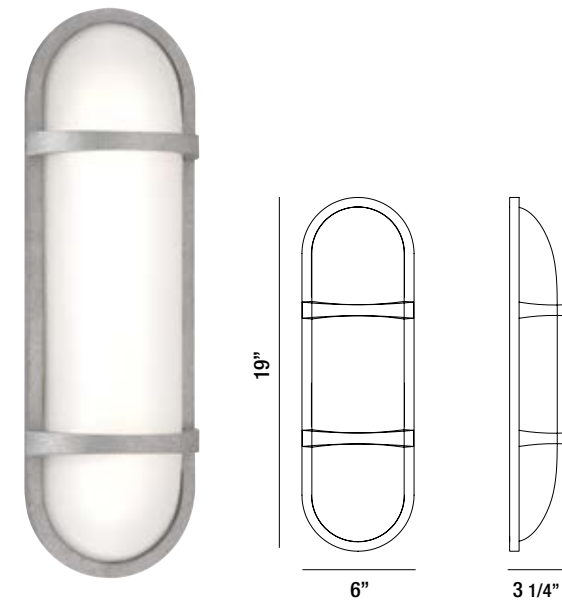


35989-011
TEXTURED SILVER
LARGE OUTDOOR LED WALL SCONCE
18W/LED 3000K/1000lm
(dimnable)

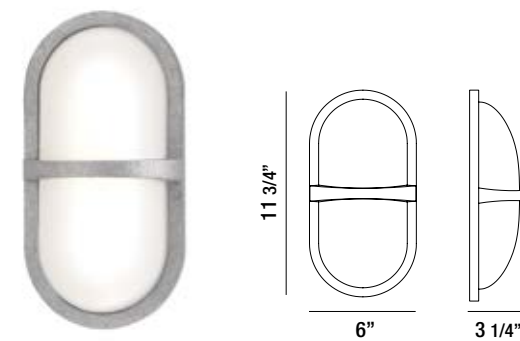


35988-014
TEXTURED SILVER
SMALL OUTDOOR LED WALL SCONCE
9W/LED 3000K/540lm
(dimnable)




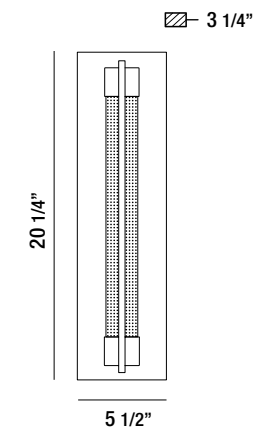

33692-012
ANTIQUÉ SILVER
 LARGE OUTDOOR LED WALL SCONCE
 2 x 5W/LED 3000K/800lm
 (dimnable)

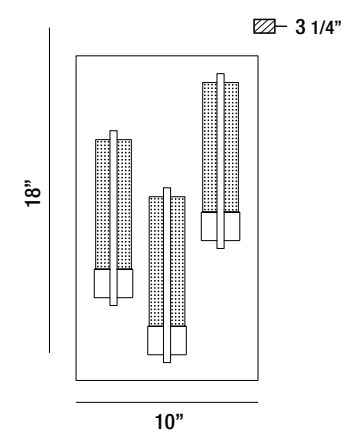


33693-019
ANTIQUÉ SILVER
 3-LIGHT OUTDOOR LED WALL SCONCE
 3 x 5W/LED 3000K/1200lm
 (dimnable)

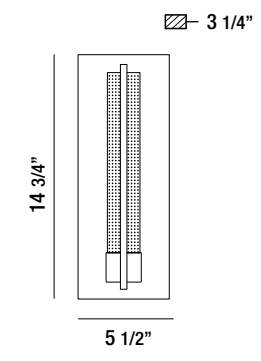


33691-015
ANTIQUÉ SILVER
 SMALL OUTDOOR LED WALL SCONCE
 5W/LED 3000K/400lm
 (dimnable)



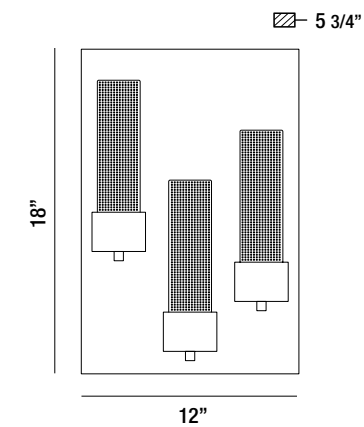


33690-018
BLACK

3-LIGHT OUTDOOR LED WALL SCONCE
3 x 4.5W/LED 3000K/1200lm
(dimmable)

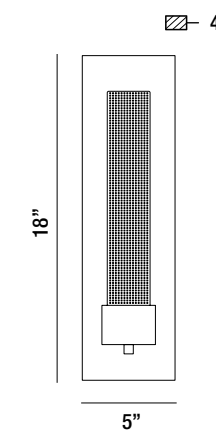

33689-012
BLACK


LARGE OUTDOOR LED WALL SCONCE
7.5W/LED 3000K/600lm
(dimmable)



33688-015
BLACK


SMALL OUTDOOR LED WALL SCONCE
4.5W/LED 3000K/400lm
(dimmable)



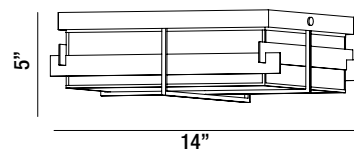


28055-013*
OIL RUBBED BRONZE

2-LIGHT OUTDOOR FLUSHMOUNT
2 x 60W/EDISON E26/120V
(included)




25604-016*
BRONZE

2-LIGHT OUTDOOR FLUSHMOUNT
2 x 60W/EDISON E26/120V
(included)




25603-019*
BRONZE

2-LIGHT OUTDOOR WALL SCNCE
2 x 60W/EDISON E26/120V
(included)

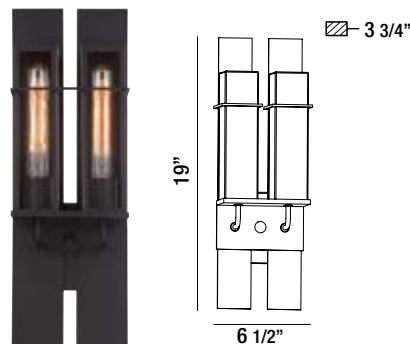


28054-016*
OIL RUBBED BRONZE

2-LIGHT OUTDOOR WALL SCNCE
2 x 60W/EDISON E26/120V
(included)




25602-012*
BRONZE

1-LIGHT OUTDOOR WALL SCNCE
1 x 60W/EDISON E26/120V
(included)



25843-019

VINTAGE FILAMENT BULB
1 x 60W/E26/120V

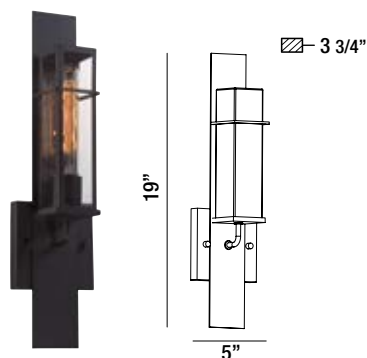

28053-019*
OIL RUBBED BRONZE

1-LIGHT OUTDOOR WALL SCNCE
1 x 60W/EDISON E26/120V
(included)




25842-012

VINTAGE FILAMENT BULB
1 x 60W/E26/120V


* VINTAGE FILAMENT BULB INCLUDED

* VINTAGE FILAMENT BULB INCLUDED

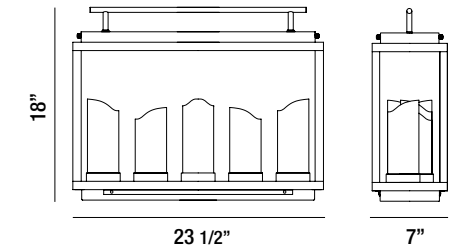

35981-015
TEXTURED BLACK


5-LIGHT LINEAR OUTDOOR LED LANTERN
5 x 0.5W/LED 2700K/125lm
(included)

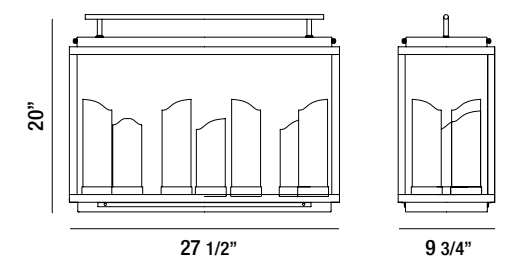


35982-012
TEXTURED BLACK

7-LIGHT LINEAR OUTDOOR LED LANTERN
7 x 0.5W/LED 2700K/175lm
(included)




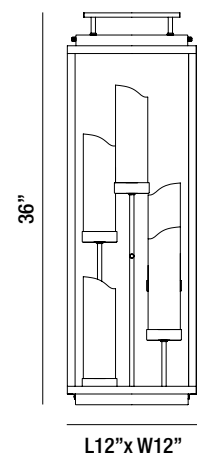


**35980-018
TEXTURED BLACK**
5-LIGHT OUTDOOR LED LANTERN
5 x 0.5W/LED 2700K/125lm
(included)

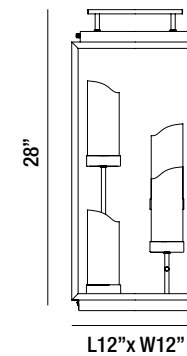

**35979-012
TEXTURED BLACK**
4-LIGHT OUTDOOR LED LANTERN
4 x 0.5W/LED 2700K/100lm
(included)



**35978-015
TEXTURED BLACK**
3-LIGHT OUTDOOR LED LANTERN
/WALL MOUNT
3 x 0.5W/LED 2700K/75lm
(included)

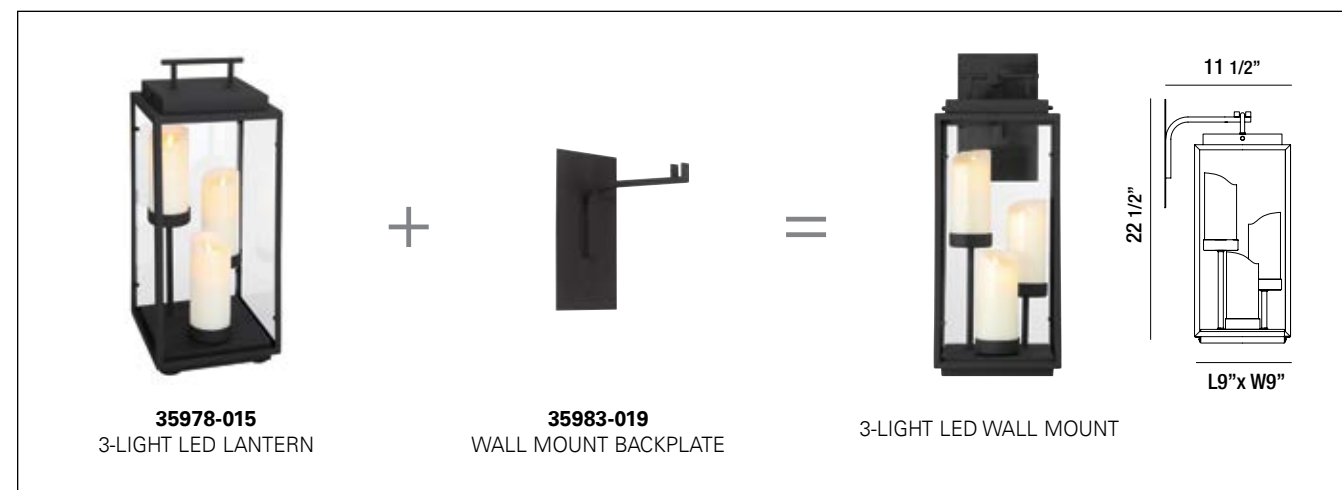

Simulated Flickering Candle
(3 x AAA batteries included)



Real Wax Body



Remote Control
(battery included)

MODEL #	PAGE #	MODEL #	PAGE #	MODEL #	PAGE #	MODEL #	PAGE #	MODEL #	PAGE #	MODEL #	PAGE #
14746-017	85	28286-028	121	31585-026	109	31960-014	45	34137-017	159	36038-032	138
14748-011	87	28287-018	121	31586-016	115	31961-011	58	34138-014	159	36041-015	139
14750-014	87	28287-025	121	31586-023	115	31962-018	58	34139-011	159	36041-020	139
14751-011	141	28288-015	105	31587-013	115	31963-015	58	34172-018	93	36041-034	139
19201-016	127	28288-022	105	31587-020	115	31964-012	58	34172-025	93	36046-010	135
19202-013	127	28289-012	107	31589-017	103	31965-019	58	34173-015	93	36046-025	135
19203-010	127	28289-029	107	31589-024	103	31966-016	58	34173-022	93	36046-037	135
19204-017	127	28290-018	117	31590-013	133	31967-013	58	34174-012	91	36051-014	135
19205-014	127	28290-025	117	31590-020	133	31968-010	58	34174-029	91	36051-022	135
19206-011	127	28291-015	117	31591-010	131	31969-017	59	34175-019	91	36051-039	135
19207-018	129	28291-022	117	31592-017	131	31970-013	59	34175-026	91	36052-011	57
19208-015	129	28292-012	119	31595-018	83	31973-014	16	35086-011	53	36202-010	31
19209-012	129	28292-029	119	31596-015	83	31974-011	19	35087-018	53	36398-010	56
19210-018	129	28293-019	101	31909-027	65	31975-018	39	35852-018	96		
19552-019	84	28293-026	101	31911-023	65	31976-015	58	35853-015	96		
22534-019	145	28294-016	134	31912-020	63	32093-018	88	35854-012	96		
23250-017	147	28294-023	134	31913-027	69	32094-015	88	35855-019	96		
23251-014	148	28295-013	119	31914-024	69	32095-012	89	35856-016	99		
23264-014	149	28295-020	119	31915-021	68	32096-019	89	35857-013	98		
23265-011	149	28296-010	108	31916-028	68	32097-016	55	35887-010	157		
23266-018	149	28296-027	108	31918-022	71	32098-013	55	35887-027	157		
23437-012	149	28297-017	108	31919-029	73	32099-010	55	35888-017	157		
25602-012	173	28297-024	108	31920-025	73	32100-013	55	35888-024	157		
25603-019	173	28301-011	125	31921-022	73	32148-015	140	35889-014	165		
25604-016	173	28302-018	125	31922-029	67	32149-012	140	35890-010	165		
25842-012	173	30286-016	137	31923-026	67	32150-018	140	35891-017	161		
25843-019	173	30286-023	137	31926-010	18	32151-015	140	35892-014	161		
26078-014	146	30287-013	137	31930-017	19	32188-011	81	35893-011	29		
26079-011	146	30287-020	137	31931-014	27	32189-018	79	35894-018	31		
28053-019	172	30288-010	137	31932-011	26	32190-014	79	35895-015	28		
28054-016	172	30288-027	137	31933-018	27	32191-011	79	35896-012	37		
28055-013	172	30289-017	137	31934-015	23	32192-018	79	35897-019	37		
28274-018	111	30289-024	137	31935-012	24	32193-015	83	35915-010	52		
28274-025	111	30347-014	124	31936-019	23	32194-012	83	35916-017	52		
28275-015	107	30349-018	124	31937-016	22	32356-014	59	35917-014	51		
28275-022	107	31435-017	143	31938-013	22	32357-011	59	35918-011	51		
28276-012	123	31436-014	143	31939-010	25	32358-018	59	35933-014	153		
28276-029	123	31437-011	143	31940-016	25	32359-015	59	35934-011	153		
28277-019	116	31574-013	101	31941-013	38	32399-12-100	58	35935-018	153		
28277-026	116	31574-020	101	31942-010	39	32399-12-250	58	35946-014	163		
28278-016	116	31576-017	133	31943-017	35	32399-12-500	58	35947-011	163		
28278-023	116	31576-024	133	31944-014	35	33688-015	171	35950-011	155		
28279-013	111	31577-014	104	31945-011	33	33689-012	171	35951-018	155		
28279-020	111	31577-021	104	31946-018	33	33690-018	171	35978-015	177		
28280-019	105	31578-011	120	31947-015	36	33691-015	169	35979-012	177		
28280-026	105	31578-028	120	31948-012	36	33692-012	169	35980-018	176		
28281-016	103	31579-018	104	31949-019	17	33693-019	169	35981-015	175		
28281-023	103	31579-025	104	31950-015	15	34116-012	98	35982-012	175		
28282-013	102	31580-014	113	31951-012	17	34117-019	95	35983-019	177		
28282-020	102	31580-021	113	31952-019	15	34118-016	95	35988-014	167		
28283-010	122	31581-011	102	31953-016	47	34119-013	99	35989-011	167		
28283-027	122	31581-028	102	31954-013	47	34120-019	97	36028-016	51		
28284-017	110	31582-018	110	31955-010	41	34121-016	97	36033-010	139		
28284-024	110	31582-025	110	31956-017	41	34122-013	74	36033-023	139		
28285-014	122	31583-015	123	31957-014	41	34123-010	74	36033-038	139		
28285-021	122	31583-022	123	31958-011	41	34124-017	75	36038-015	138		
28286-011	121	31585-019	109	31959-018	45	34125-014	75	36038-026	138		



Eurofase Inc.
33 West Beaver Creek Road
Richmond Hill, Ontario
Canada L4B 1L8

tel 905.695.2055 toll free 1.800.660.5391
fax 905.695.2056 toll free 1.800.660.5390

Dallas Trade Mart
Eurofase Showroom, Suite #4002

www.eurofase.com



Printed in Canada
© 2019 Eurofase Inc. All rights reserved.
Product Specifications and Approvals

Eurofase Inc. reserves the right to make alterations to the construction and design of products shown in this catalog in order to meet the laws or regulations of any authorized governing organization. The use of products shown in this catalog must comply with local building codes.